



Cardas Audio

2024 Product Guide Cenník v EUR

Platan Audio 4/2024



The basic building blocks of a Cardas cable have been constant since day one: Our own, Ultra Pure Copper, produced using our proprietary method. Multi-stranded Litz conductors, with strand size varying in Golden Ratio steps. Top quality dielectric materials and innovative air-tube dielectric suspension techniques. Premium connectors machined from copper & brass, plated with silver, and a flash of rhodium. Terminations performed by skilled craftsmen, using Cardas Quad Eutectic Solder and Cardas Rosin Flux Soldering Paste. These design elements were present in the original Cardas cables, like Quadlink & Hexlink, and former flagships such as Golden Cross & Golden Reference.

Our Clear cable line combines all of this with Matched Propagation Technology, the subject of George's most recent patent (US Patent 7,674,973), which matches the propagation rate of the conductor to that of the dielectric, eliminating time-smear distortion, improving musical integrity and dynamic range.




Warranty

All factory terminated cables come with our unmatched, transferable, Lifetime Warranty in USA. In addition, we are dedicated to having the best customer service in the world.
V SR je záručná doba podľa zákonov SR 24 mesiacov.

Cardas Copper

At the heart of a Cardas cable is our Ultra Pure Cardas Copper. Mined in the Southwest USA and processed the Northeast, we employ proprietary drawing and annealing techniques to create the highest quality, purest copper strands. A Single Poly-Nylon coating is applied to prevent oxidation, and eliminate crosstalk between strands.



Viewed through a microscope, typical copper wire appears shredded and interleaved with impurities.



Cardas Copper, however, is drawn & annealed very slowly through Silver dies, in an Oxygen free, Hydrogen reduction atmosphere. The result is grain free, perfectly smooth and 99.9999% pure Copper strands.



In addition to our own cables, Cardas Copper is used by other high-end audio manufacturers, and in scientific applications.

Golden Ratio Scaled Conductors

As implied by our Nautilus Shell logo, the Golden Ratio is applied to many Cardas products, including our Litz conductor designs. In a Cardas multi-stranded Litz conductor, the smallest wires are at the center, with each layer increasing in size at a Golden Ratio step (1:1.618). This innovative micro resonance control technique was the subject of


one of George Cardas' first US patents, and is present in all of our cables & chassis wires.



one of George Cardas' first US patents, and is present in all of our cables & chassis wires.

Matched Propagation

The subject of George's 2008 US Patent (7,674,973), our Clear product line features Matched Propagation Technology, in which the propagation rate of the conductor is controlled through its internal geometry to match that of the dielectric material. These conductors overcome challenges dating back to the early days of the telephone. However, whereas those conductor/dielectric mismatches were dealt with using network boxes, Matched Propagation Conductors solve the problem within the cable itself - keeping the signal intact the entire way, rather than attempting to fix it after the fact.



Terminations

Terminating, or "putting a connector on" a Cardas multi-stranded Litz conductor requires skill and special equipment. We use our own Cardas Quad Eutectic Solder and Cardas Rosin Flux Soldering Paste, along with 800°F (427°C) irons & 700°F (371°C) solder pots. Our flagship speaker cables are terminated with a solder-less, compression die forging process in which the copper of the conductor and connector fuse together as one. These procedures are performed by our talented staff of Cardas Terminators, with decades of combined experience.



Cardas Connectors

Cardas connectors are machined from billet copper or brass, and plated with silver and a flash of rhodium. In addition to our own cables, Cardas connectors can be found on some of the finest equipment in the world.



Výhradný distribútor pre Slovenskú republiku :

Platan Audio
M.R. Štefánika 12
920 01 Hlohovec


Kontakt: Eduard Nemček
Email : platan@platanaudio.sk
WEB : www.platanaudio.sk

Mobil : (+421) 0905 409 802
Tel. Hlohovec : 033 7300531
Tel. predajňa BA :02 527 331 91

For further reading on these topics and more please visit www.cardas.com



Cardas Audio

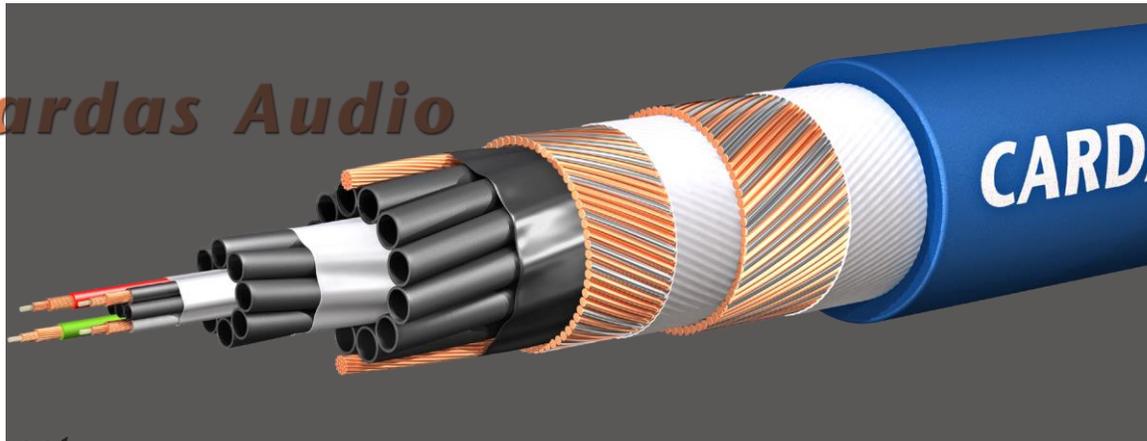

Clear Beyond Interconnect

Performance

Clear Beyond Interconnect, our ultimate flagship interconnect and a marvel of modern cable design, features our most advanced Matched Propagation Conductors. Clear Beyond Interconnect brings noteworthy improvements in spatial imaging, dynamics, and low frequency impact while retaining the classic Cardas musicality.

Clear Beyond Interconnect builds on over 30 years of Cardas Audio's relentless dedication to the perfection of high performance cables. Superior shielding and advanced air-tube suspension geometry result in an O.D. of .511", which necessitates the use of our XRCA 13 adaptor for single-ended termination, and a re-designed CG XLR for balanced cables.

More than anything, Clear Beyond Interconnect is musical. Tonal balance is completely neutral with unsurpassed speed and transparency. Each pair is made to order and hand terminated only by our senior technicians.


Standard Terminations: Cardas SRCA or CG XLR. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and range from 47 AWG to 39 AWG. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket. Geometry: Star-Quad 4 conductors with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Outer layer uses PTFE air-tubes scaled 1.618 times larger than the core tubes to suspend the composite shield of tinned copper and magnet wire away from the signal carrying conductors. Finished in an ultra soft extruded TPR jacket.

Gauge: 4x26.5 AWG


Outside Diameter: 0.511"/13mm

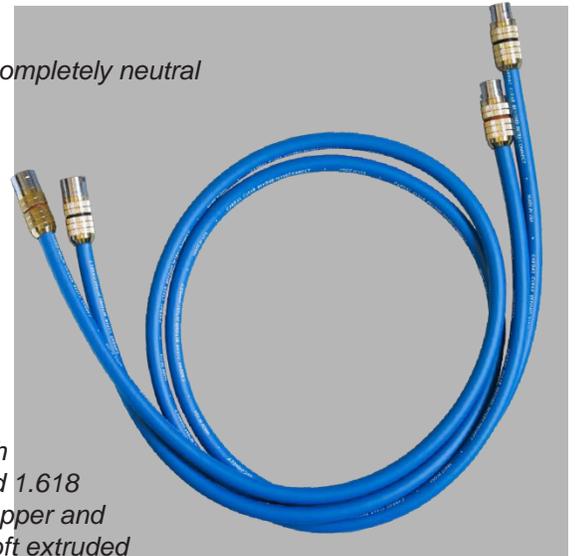

Clear Beyond Interconnect

Cena za pár	0.5m	Platan special 0,75m	1m	1.5m	2m	2.5m	3m
Eur	4460	4990	5460	6470	7480	8480	9490

Väčšie dĺžky na dopyt a objednávku. Každý ďalší meter 2020,-Eur





Clear Interconnect

Performance

Completely neutral and transparent. Superb dynamics, high frequency extension and speed. Our flagship interconnect designed for reference level systems in acoustically neutral listening rooms. Perfect control over the entire frequency range. Extracts every detail and remains musical. Works great in long or short runs.

Standard Terminations: Cardas SRCA or CG XLR.
Hand terminated in Bandon, Oregon.


Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and range from 41 AWG to 39 AWG. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket.

Geometry: Equilateral triad 3 conductors with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Outer layer uses PTFE air-tubes scaled 1.618 times larger than the core tubes to suspend the composite shield of tinned copper and magnet wire away from the signal carrying conductors. Finished in an ultra soft extruded TPR jacket.

Gauge: 3x25.5 AWG

Outside Diameter: 0.450"/11.43mm

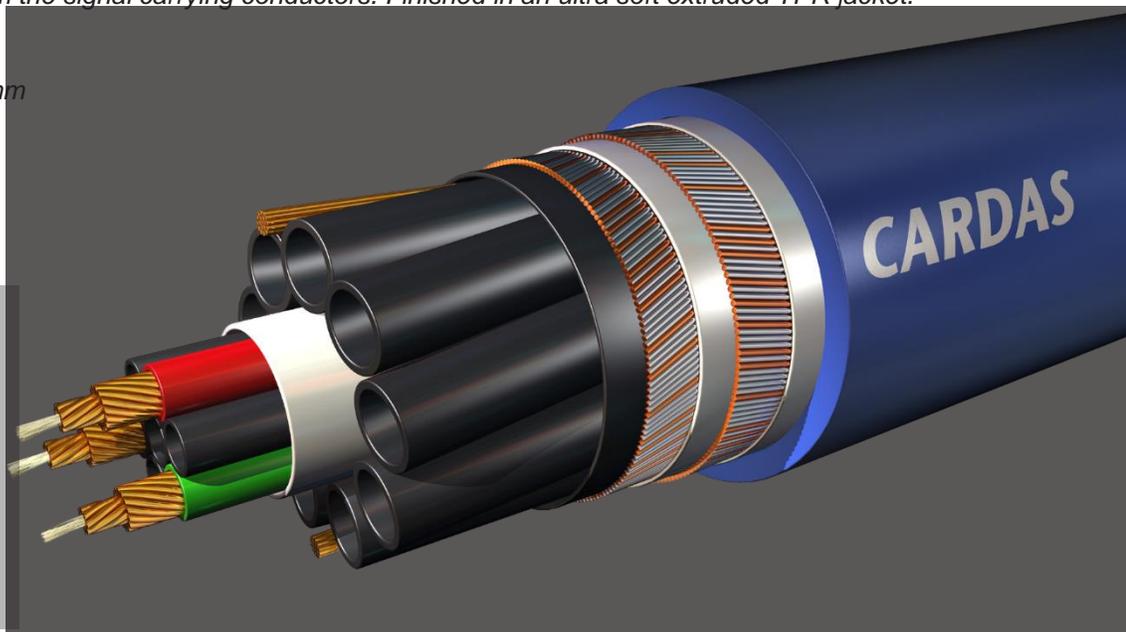

Clear Interconnect

Cena za pár	0.5m	Platan speciál 0,75m	1m	1.5m	2m	2.5m	3m	3.5m	4m	5m
Eur	2170	2550	2890	3590	4300	5020	5730	6440	7150	8580

Každý ďalší meter : 1430,-Eur



Clear Reflection Interconnect

Performance

Designed to bring flagship level performance to real world systems, this cable has excellent high frequency extension and speed but is still slightly forgiving. Very neutral and dynamic with pitch black background. Clear Reflection pays homage to the Golden Reference, blending the very best of old with the very best of new. Clear Reflection also introduces a new copper colored SRCA which matches the black and copper cosmetics from Clear Reflection Speaker cable.


Standard Terminations: Cardas SRCA-CU or CG XLR-CU. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in extruded PFA jacket.
Geometry: Suspended air core twisted pair with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Outer layer uses PTFE air-tubes scaled 1.618 times larger than the core tubes to suspend the double composite shields of tinned copper and magnet wire away from the signal conductors. Finished in black ultra soft extruded TPR jacket.

Gauge: 2x25.5 AWG

Outside Diameter: 0.420"/10.66mm

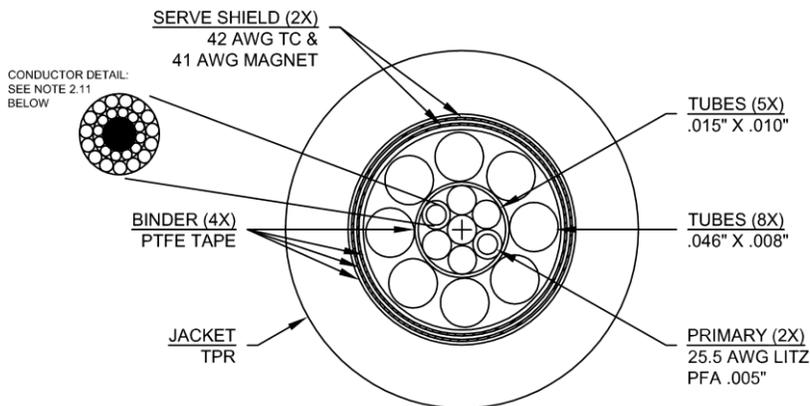

Clear Reflection Interconnect

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	1210	1540	1930	2310	2820	3220	3630	4030	4430	4830

Každý ďalší meter : 810,-Eur



Cardas Audio



Clear Cygnus Interconnect

Performance

Clear Cygnus Interconnect benefits greatly from the latest developments in the Clear product line, including a more economical version of Clear Beyond Interconnect's air-tube suspension. This cable replaces Clear Light and brings added performance to the table without adding much to the price. Clear Cygnus is more detailed, but also slightly richer with better low frequency performance. Clear Cygnus performs well in any system at any length, in both single ended and balanced configurations. If you want Cardas musicality but with a neutral tonal balance, look no further.

Standard Terminations: Cardas GRMO or Neutrik XLR. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in double layered PTFE tape wrapped jacket.

Geometry: Star-Quad 4 conductor, with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Outer layer uses PTFE air-tubes scaled 1.618 times larger than the core tubes to suspend the composite shield of tinned copper and magnet wire away from the signal conductors. Finished in an ultra soft extruded TPR jacket.

Gauge: 4x25.5 AWG


Outside Diameter: 0.384"/9.76mm

Clear Cygnus Interconnect

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	840	1095	1350	1610	1790	2040	2390	2650	2900	3160

Každý ďalší meter : 520,-Eur

Cardas CG XLR upgrade: 460,-Eur

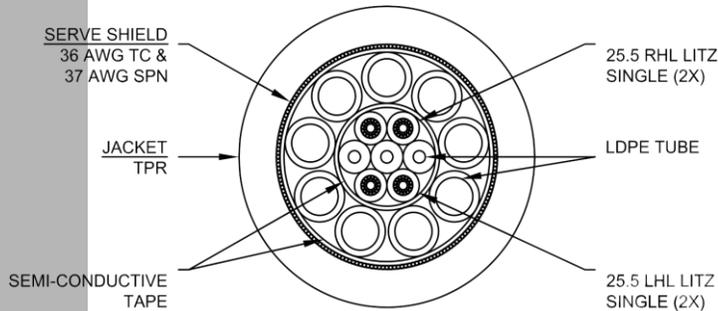

Cardas Audio Ltd. ~ 480 11th Street SE, Bandon ~ OR 97411 www.cardas.com



CARDAS CLEAR CYGNUS INTERCONNECT

MADE IN USA

CARDAS CLEAR CYGNUS II



Clear Sky Interconnect

Performance

Transparent, dynamic, and neutral. Lowest priced interconnect using Matched Propagation technology. Excellent in long or short lengths. Suitable for any high-end system.

Standard Terminations: Cardas GRMO RCA or Neutrik XLR. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Braided cross-field layer geometry, insulated in advanced ultra thin FEP tape wrapped jacket.

Geometry: Shielded twisted pair with non conductive poly-e air-tubes bound with advanced ultra thin FEP tape wrap. Outer layer uses compressed poly-e air-tubes to suspend the tin plated copper braided shield and extruded alcryn rubber outer jacket away from the conductors.

Gauge: 2x23.5 AWG

Outside Diameter: 0.365"/9.27mm



Clear Sky Interconnect

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	540	690	840	990	1140	1290	1440	19400	1740	1890

Každý další meter : 300,-Eur



Cardas Audio



Parsec Interconnect

Performance

Neutral with a hint of warmth on top. Very transparent for a cable of this price range. Excellent blend of warm midrange with extended bass and treble. This is the runaway favorite for best value in cables. Performs at levels more than twice its price.

Standard Terminations: Cardas GRMO RCA or Neutrik XLR.
Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Kevlar core, Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Braided cross-field layer geometry, insulated in FEP tape wrapped jacket.

Geometry: Shielded twisted pair with poly-e air-tubes bound with carbon impregnated FEP tape wrap. Outer layer uses compressed poly-e air-tubes to suspend the tin plated copper braided shield and outer extruded alcryn rubber jacket away from the conductors.

Gauge: 2x23.5 AWG
Outside Diameter: 0.360"/9.14mm

Parsec Interconnect

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	390	520	680	770	900	1030	1150	1280	1410	1530

Každý ďalší meter : 255,-Eur



Cardas Audio

Iridium Interconnect

Performance

Combining a star quad arrangement with our proven golden ratio copper conductors, Iridium achieves the perfect balance of detail and warmth. Natural treble is blended with a smooth midrange and quick bass response for a very musical interconnect.

Standard Terminations: Cardas GRMO or Neutrik XLR. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a FEP jacket.

Geometry: Shielded Star-Quad 4 conductor bound together in PTFE tape.

Hybrid shield combines a spiral of tin plated copper and a carbon impregnated PTFE tape.

Finished in an ultra soft and flexible extruded TPR jacket.

Gauge: 4x24.5 AWG

Outside Diameter: 0.300"/ 7.62mm



MADE IN USA

CARDAS AUDIO, EST 1987

CARDAS IRIDIUM INTERCONNECT

MADE IN USA

Iridium Interconnect

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	249	289	329	369	409	445	489	529	569	609

Každý ďalší meter : 81,-Eur



Cardas Audio Ltd. ~ 480 11th Street SE, Bandon ~ OR 97411
www.cardas.com



Cardas Audio



Crosslink Interconnect

Performance

Warm and forgiving but still detailed and musical. Designed for entry level to mid level stereo and home theater applications. Available with RCA or XLR.

Standard Terminations: Cardas GRCM RCA or Neutrik XLR. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Grade 2, 99.99% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a polyurethane jacket.

Geometry: Twisted pair with natural cotton filler bound with FEP tape wrap. Tin plated copper spiral shield, PVC outer jacket.

Gauge: 2x20.5 AWG

Outside Diameter: 0.303"/7.69mm

Crosslink Interconnect

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	167	199	229	265	299	335	369	405	439	475

Každý ďalší meter : 70,-Eur



Cardas Audio Ltd. ~ 480 11th Street SE, Bandon ~ OR 97411
www.cardas.com




Cardas Audio

Clear Beyond Speaker

Performance

Based on the flagship Clear speaker cable and developed to go beyond reference performance in cost no object systems where the speakers require large amounts of current flow, Clear Beyond speaker is absolutely neutral and transparent. Perfectly balanced with articulate lows and delicate highs. Amazing dynamics with zero compression. This cable is like running two pairs of Clear Speaker inside one jacket and can be internally bi-wired or bi-amped.

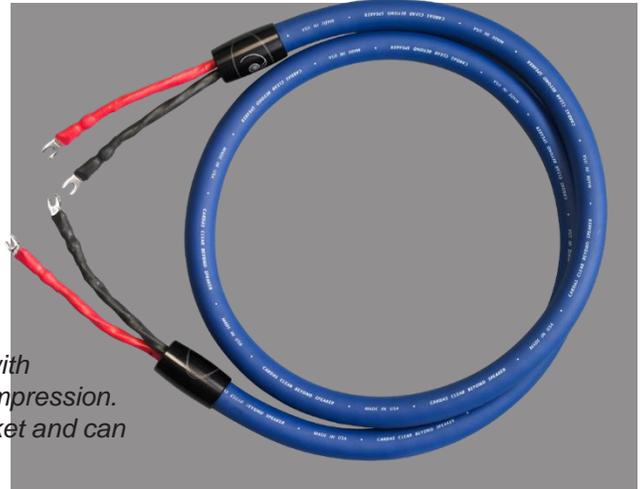

Standard Terminations: Cardas spades or bananas forged using 10,000psi in Bandon Oregon.


Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions ranging from ultra fine 41 AWG to 25 AWG. Cross-field layer geometry, insulated in an FEP tape wrapped jacket.

Geometry: Concentrically wound eight conductor with anti-static PTFE air tubes and a flexible TPR outer jacket.

Gauge: 8x10.5 AWG

Outside Diameter: 0.934"/23.72mm

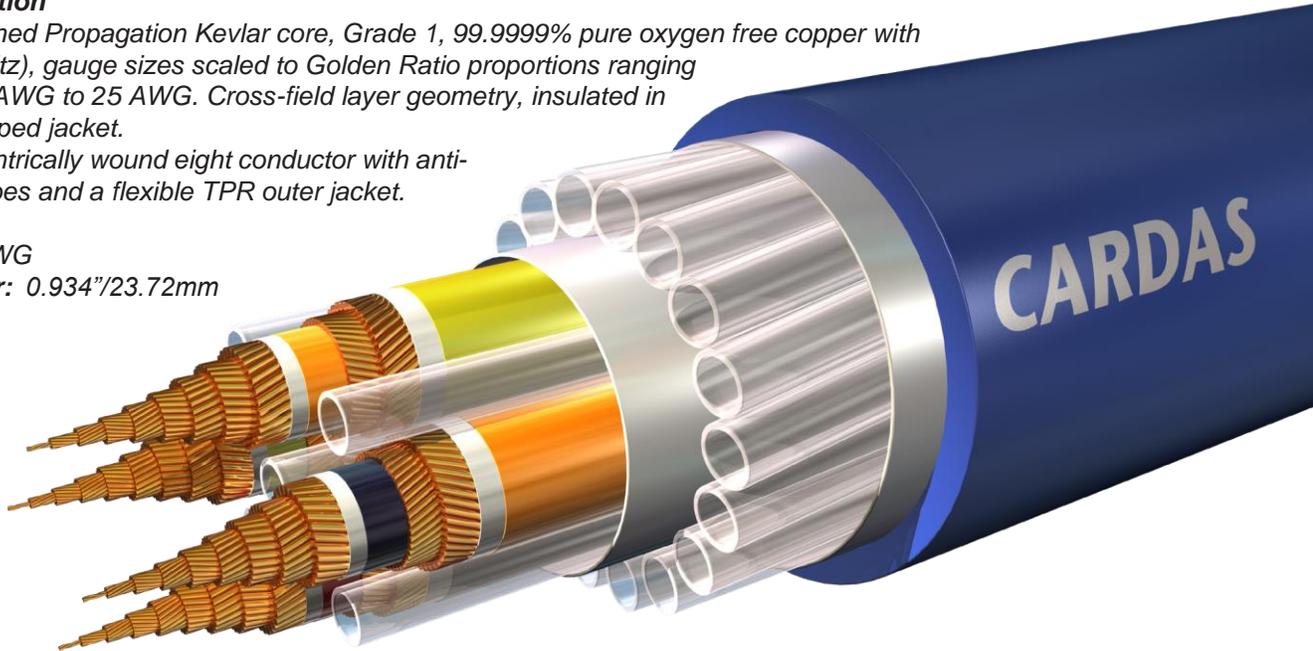

Clear Beyond Speaker

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	6760	8625	10490	12360	14230	16090	17970	19840	21710	23580

Každý ďalší meter : 3740,-Eur

Bi-wire príplatok :

Eur	810
-----	-----





Cardas Audio



Clear Speaker

Performance

The most musical and revealing speaker cable ever produced by Cardas Audio. Designed to be completely transparent and holographic, this cable matches the legendary Cardas sound with unforgiving detail delivery.

Standard Terminations: Cardas spades or bananas forged using 10,000psi in Bandon Oregon. Not available with internal bi-wire. See our Clear Jumpers for bi-wire applications.


Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions ranging from ultra fine 41 AWG to 25 AWG. Cross-field layer geometry, insulated in an FEP tape wrapped jacket.

Geometry: Concentrically wound four conductor surrounded by anti-static fibers with a flexible TPR outer jacket.

Gauge: 4x10.5 AWG


Outside Diameter: 0.675"/17.14mm

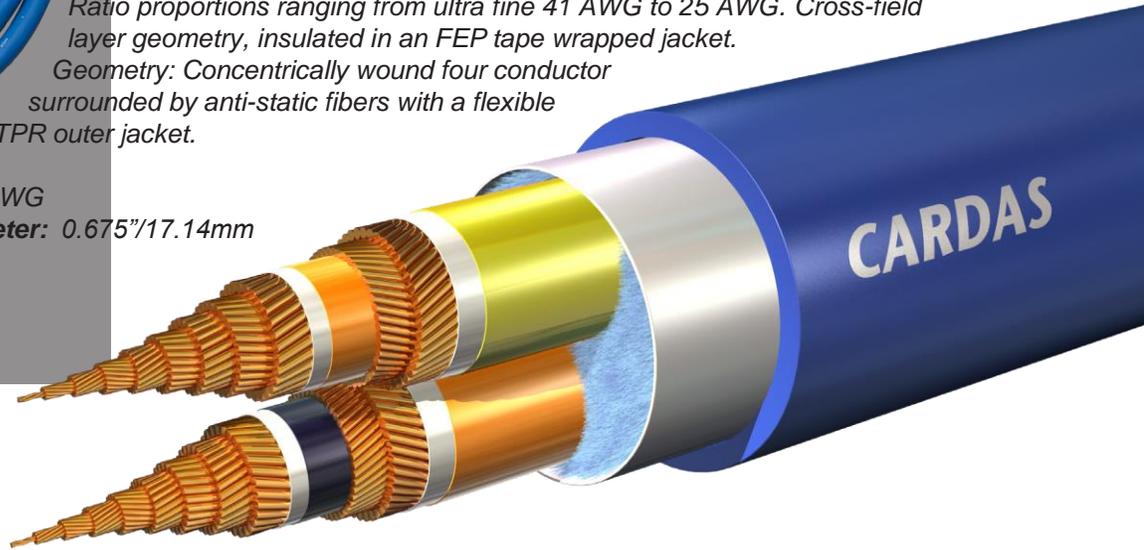

Clear Speaker

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	3395	4260	5120	5980	6850	7700	8570	9430	10290	11160

Každý ďalší meter : 1725,-Eur

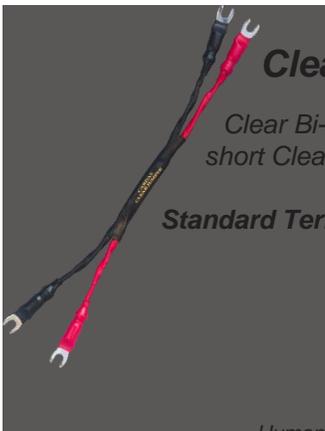

Clear Jumpers

Clear Bi-wire Jumpers use Clear speaker conductors, arranged like a very short Clear speaker cable.

Standard Termination: Forged spades or forged bananas.

Clear Jumpers

Eur	429
-----	-----



Cardas Audio



Clear Reflection Speaker

Performance

Designed to blend the best of Golden Reference with the benefits of Clear and Matched Propagation technology. This cable has the richness and musicality of the classic and very successful Golden Reference, but also has the clarity and transparency of Clear. It can be internally bi-wired or tri-wired.

Standard Terminations: Cardas spades or bananas forged using 10,000psi in Bandon Oregon.


Design/Construction

Conductors: Matched Propagation, Kevlar core Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a FEP taped jacket.

Geometry: Anti-static fiber core Tri-Quad 12 conductor with anti-static filler to separate the three groups bound together in FEP tape. Flexible TPR outer jacket.

Gauge: 12x11,5 AWG

Outside Diameter: 0.680"/17.27mm

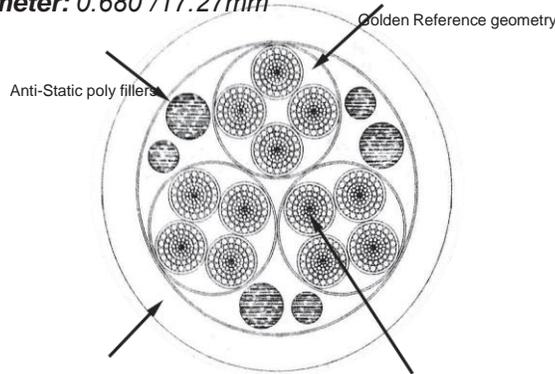

Clear Reflection Speaker

Cena za pár	0.5m	1m	1.5m	2 m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	2070	2530	2990	3450	3910	4370	4830	5290	5750	6210

Bi-wire príplatok:

Eur	250
-----	-----

Každý ďalší meter : 920,-Eur



Clear Cygnus Speaker

Performance

It wasn't easy to improve upon Clear Light without giving up it's incredible value, but we did it! Clear Cygnus is more revealing, more holographic, and more refined. Matched Propagation conductors help to provide a very open and dynamic sound. In addition it can be internally bi-wired which wasn't an option with Clear Light.

Standard Terminations: Cardas spades or bananas forged using 10,000psi in Bandon Oregon.

Design/Construction

Conductors: Braided Matched Propagation Kevlar core, Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE tape and Electro-Dissipative dielectric.

Geometry: Concentrically braided four conductor surrounded by anti-static fibrillated polypropylene fibers. Outside jacket is a soft and flexible TPE rubber.

Gauge: 4x15 AWG

Outside Diameter: 0.695"/17.67mm




Clear Cygnus Speaker

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	1050	1350	1650	1950	2250	2550	2840	3140	3440	3740

Bi-wire príplatok

Eur	250
-----	-----

Každý ďalší meter : 600,-Eur

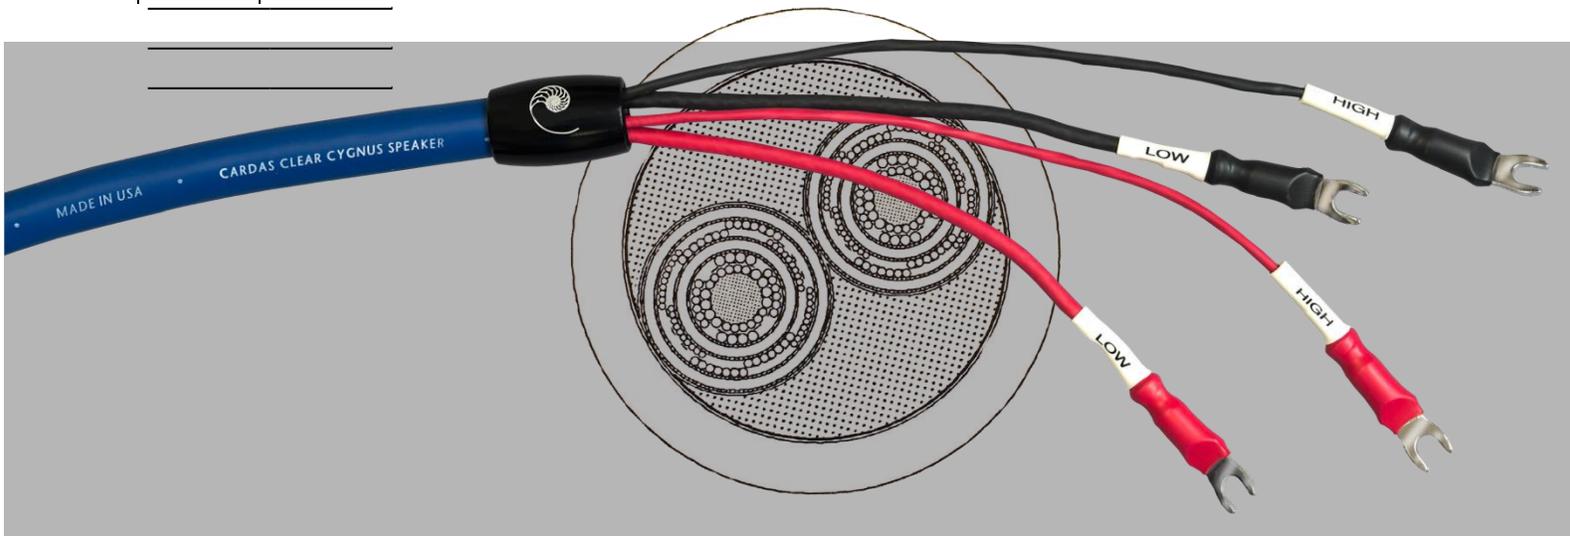

Cardas Audio Ltd. ~ 480 11th Street SE, Bandon ~ OR 97411



SE 9 MP Speaker

Performance

This minimalist design approach has proven to be very successful. Pairs very well with low to medium power amps and above average efficiency speakers. Don't let the small diameter fool you, this cable sounds much bigger than it looks. Very flexible so it fits well in tight spaces. Not available with internal bi-wire.

Standard Terminations: Cardas CGMS spades or CABD bananas. Hand soldered in Bandon, Oregon.


Design/Construction

Conductors: Braided Matched Propagation Kevlar core, Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE tape.

Geometry: Concentrically wound two conductor. Outside jacket is a soft and flexible TPE rubber.

Gauge: 2x15 AWG

Outside Diameter: 0.289"/7.35mm

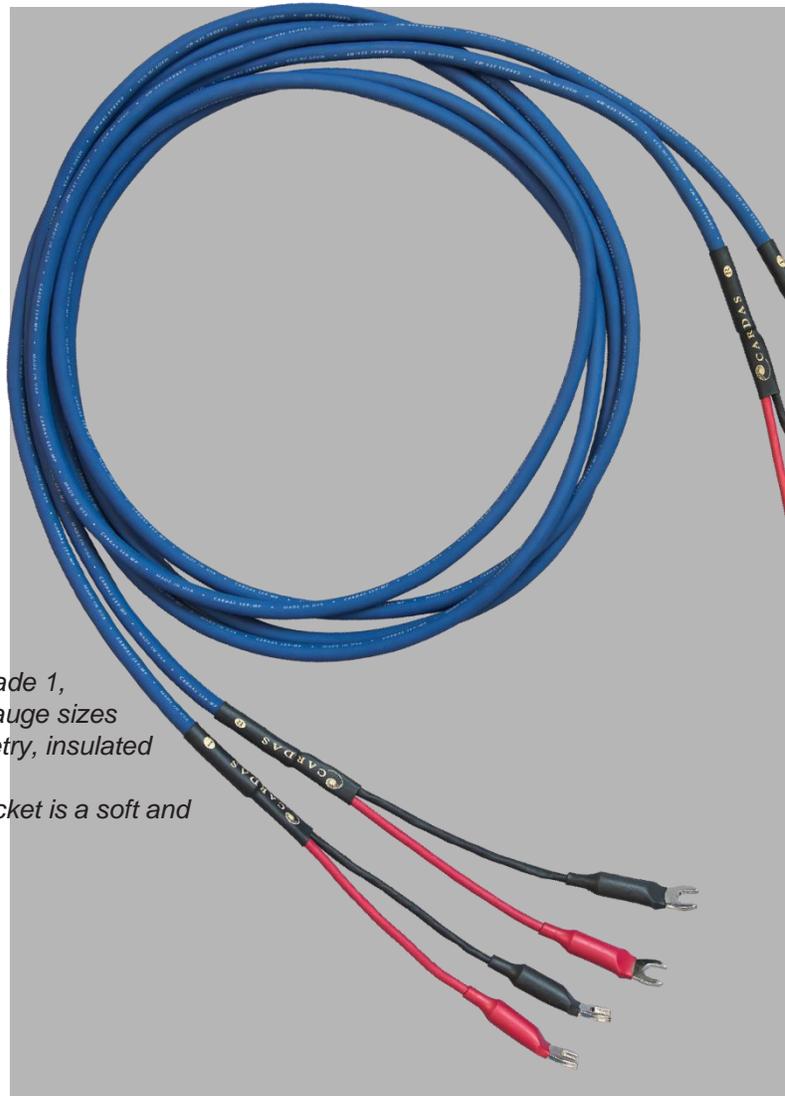

SE9MP

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	660	850	1050	1250	1440	1640	1830	2030	2220	2420

Každý ďalší meter : 390,-Eur





Clear Sky X4 Speaker

Performance

Based on its big brother, Clear Cygnus speaker cable, the newly up-graded Clear Sky X4 now offers better resolution than the original Sky, and is more suitable for a wider range of speakers. Our new braided conductors allow reduced production time with minimal sacrifice of performance. The new X4 geometry also allows for internal bi-wire.

Finished with Cardas custom printed shrink tubing instead of machined aluminum strain relief, and soldered connectors instead of compression die forged terminations, Clear Sky X4 brings serious performance to the most affordable end of the Clear cable line.

Standard Terminations: Cardas CGMS spades or CABD bananas. Hand soldered in Bandon, Oregon.

Design/Construction

Conductors: Braided Matched Propagation, fibrillated polypropylene core, Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a low noise PTFE tape and Electro-Dissipative dielectric.

Geometry: Concentrically braided four conductor surrounded by anti-static coated fibrillated polypropylene fibers. Outside jacket is very flexible Alcryn Rubber.

Gauge: 4x15 AWG

Outside Diameter: 0.720"8.30mm



Bi-wire príplatok

Eur	200
-----	-----

Clear Sky X4 Speaker

Každý ďalší meter : 440,-Eur

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	510	730	950	1160	1380	1600	1820	2040	2260	2480



Parsec Speaker

Performance

Superb balance of characteristics. Classic Cardas midrange, quick bass, rich harmonics, and a naturally extended top octave. Works great with virtually any speaker including bi-wire. This cable evolved from Quadlink and is a mix of old and new technology found in our flagship cables.

Standard Terminations: Cardas CGMS spades or CABB bananas. Hand soldered in Bandon Oregon.


Design/Construction

Conductors: Braided Kevlar core Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE jacket.

Geometry: Nylon air tube core surrounded by Anti-static fibers, Star-Quad 4 conductor with PTFE air-tubes bound together in FEP tape. Flexible TPR outer jacket.

Gauge: 4x15.5 AWG

Outside Diameter: 0.500"/12.7mm

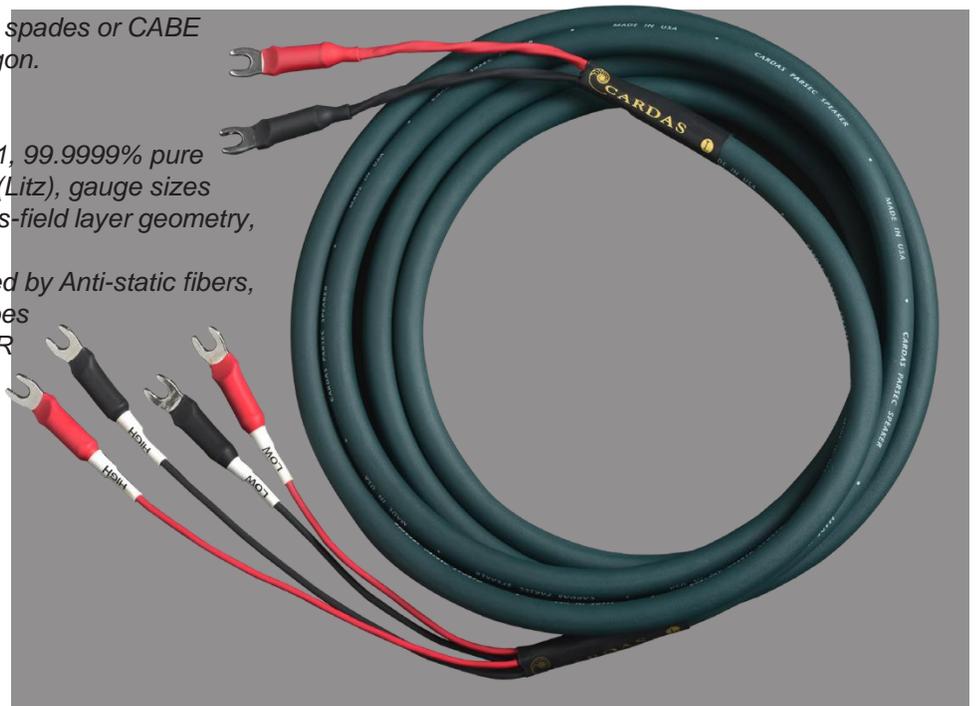

Parsec Speaker

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	440	525	635	750	865	980	1095	1210	1325	1440

Bi-wire príplatok

Eur	150
-----	-----

Každý ďalší meter : 230,-Eur



Cardas Audio Ltd. ~ 480 11th Street SE, Bandon ~ OR 97411
www.cardas.com



Cardas Audio

Iridium Speaker

Performance

Suitable for virtually any amp/speaker combination. Perfect for long or short runs. Rich midrange with strong bass and smooth treble. Iridium speaker cable performs like a product costing much more. This cable is very soft and flexible for its size. Jumpers are required for bi-wire.

Standard Terminations: Cardas CGMS spades or CABE bananas. Terminated by hand in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure OFHC with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a FEP jacket.

Geometry: Twisted pair with natural cotton filler bound with PTFE tape wrap. Finished in an ultra soft and flexible extruded TPR jacket.

Gauge: 2x11.5 AWG

Outside Diameter: 0.415"/10.54mm



Iridium Speaker

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	270	315	380	450	520	590	660	725	795	865

Každý ďalší meter : 140,-Eur



Cardas Audio

Crosslink Speaker

Performance

Well balanced sound with great detail. Perfect for mid to entry level two channel and multi channel systems. Can be single wire or bi-wired. Also available in bulk so you can brew your own if you like. Printed with CL2 rating for in-wall use.


Standard Terminations: Cardas GRS spades or CABA bananas. Hand soldered in Bandon Oregon.

Design/Construction

Conductors: Air-tube core, grade 1 oxygen free copper.
Gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a poly jacket.
Geometry: Star-Quad 4 conductor with natural cotton filler bound together in FEP tape. Outer jacket is PVC

Gauge: 4x14.5 AWG

Outside Diameter: 0.365"/9.27mm

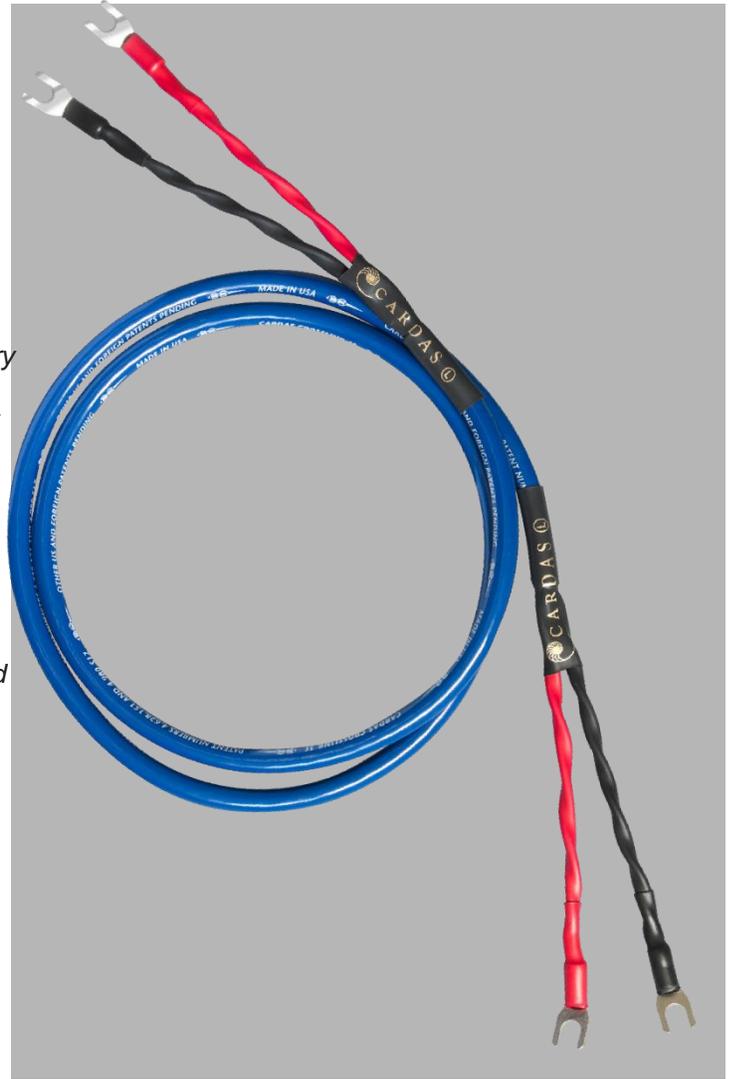

Crosslink Speaker

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	220	245	285	325	365	400	445	485	525	565

Bi-wire príp

Eur	90
-----	----

BiWire príplatok jedna strana (standard na strane reprosústav)

Každý ďalší meter : 81,-Eur



101 Speaker

Performance

Smooth, non-fatiguing, and musical. The new entry level 101 sets the standard for high value speaker cables, and it's made in the USA! Available in bulk on 250 foot spools or factory terminated. Bare copper conductors make this quick and easy to terminate for DIY users.

Standard Terminations: Cardas CABE bananas or GRS spades. Hand soldered in Bandon Oregon.

Design/Construction

Conductors: Air-tube core, Cardas OFHC bare copper. Gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a poly jacket.

Geometry: Twisted pair two conductor with natural cotton filler bound together with PFA tape. Super flexible TPR outer jacket.

Gauge: 2x14 AWG

Outside Diameter: 0.365"/9.27mm



101 Speaker

Cena za pár	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	165	175	205	229	259	289	319	345	375	405

Každý ďalší meter : 60,-Eur




101 Speaker Cievka 76m

Cena Eur za Cievku / 1m metráž	1950 Eur Cievka	29 / 1m
--------------------------------	-----------------	---------



Cardas Audio

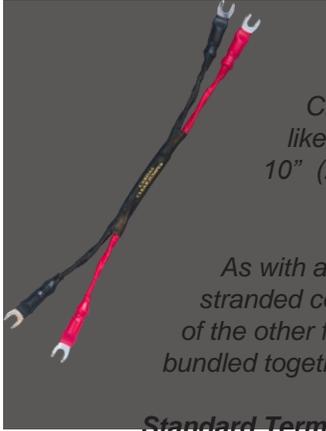

Clear Jumpers

Clear Bi-wire Jumpers use Clear speaker conductor, arranged like a very short Clear speaker cable. Clear Jumpers measure 10" (25.4cm).

As with all Clear speaker cables, Clear Bi-wire jumpers use multi-stranded concentric conductors. The outside of one concentric conductor is tied to the inside of the other for each lead (positive & negative). This is why the positive and negative leads are bundled together and can not be separated.

Standard Termination: Cardas spades or bananas forged using 10,000psi in Bandon Oregon.

Clear Jumpers

Cena za pár	429
-------------	-----

9.5 AWG Jumpers

Design/Construction

6"/15.24cm bi-wire jumpers.

Conductors: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE jacket.

Standard Terminations: Cardas CGMS spades or CABD bananas. Hand soldered in Bandon Oregon. Sold in sets of 4.



9.5 AWG Jumpers

Cena za pár	290
-------------	-----

11.5 AWG Jumpers

Design/Construction

6"/15.24cm bi-wire jumpers.

Conductors: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE jacket.

Standard Terminations: Cardas GRS spades or CABE bananas. Hand soldered in Bandon Oregon. Sold in sets of 4.



11.5 AWG Jumpers

Cena za pár	185
-------------	-----

CJP Jumper Plates

Design/Construction

Stamped from solid Grade 1, 99.9999% pure oxygen free copper.


Designed to fit 1.5" (38.1mm) binding post spacing. Dual spade size can fit standard 6.3mm or larger 9mm binding posts. Can be carefully bent to fit application if needed. Available in bare copper or silver/rhodium plate.

Sold in sets of 4.



Cena za pár CLJP R 115, Eur

CLJP C 59,-Eur

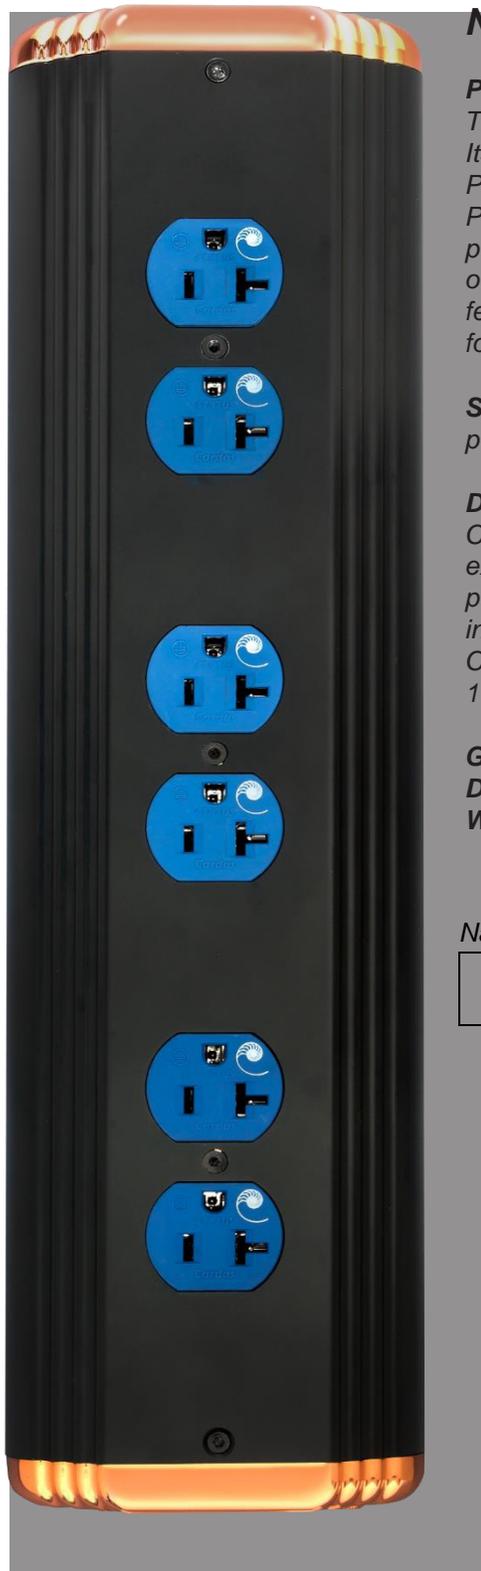

Nautilus Power Strip

Performance

The Nautilus is the Cardas approach to pure power distribution. Its elegant design is centered around premium, custom designed connectors. Point-to-Point wiring with heavy gauge, Ultra Pure solid core copper conductors. Passive RFI/EMI protection on every outlet, the same filters found on our flagship power cables. 3D printed wire guides ensure the uniformity of each coil. Capable of delivering clean, high current to all six outlets. An attractive case echoes design features from the original Cardas Golden 6A power strip. This power strip is perfect for anyone who wants their entire system connected to one high quality device.

Standard Terminations: Standard 15 amp IEC inlet and Cardas 4181US premium power outlets. Assembled by hand in Bandon, Oregon.

Design/Construction

Conductors: Solid core Grade 1, 99.9999% pure oxygen free copper insulated with extruded PVC. Ground conductor is Grade 1, 99.9999% pure oxygen free copper, gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PFA jacket.

Chassis: Antiresonant extruded aluminum body with copper plated brass end caps. 1 kilogram copper earth plate.

Gauge: 2x10 AWG, 1x11.5 AWG

Dimensions: 15.75"x4.25"x2.5"

Weight: 7.65 lbs.

Nautilus Power Strip

Cena za kus	2290 Eur
-------------	----------

20 amp version

Cena za kus	2420 Eur
-------------	----------





Cardas Audio



Nautilus EU Power Strip

Performance

The Nautilus is the Cardas approach to pure power distribution. Its elegant design is centered around premium, custom designed connectors. Point-to-Point wiring with heavy gauge, Ultra Pure solid core copper conductors. Passive RFI/EMI protection on every outlet, the same filters found on our flagship power cables. 3D printed wire guides ensure the uniformity of each coil. Capable of delivering clean, high current to all five outlets. An attractive case echoes design features from the original Cardas Golden 6A power strip. This power strip is perfect for anyone who wants their entire system connected to one high quality device.

Standard Terminations: Standard 15 amp IEC inlet and Cardas 4181EU premium schuko power outlets. Assembled by hand in Bandon, Oregon.

Design/Construction

Conductors: Solid core Grade 1, 99.9999% pure oxygen free copper insulated with extruded PVC. Ground conductor is Grade 1, 99.9999% pure oxygen free copper, gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PFA jacket.

Chassis: Antiresonant extruded aluminum body with copper plated brass end caps. 1 kilogram copper earth plate.

Gauge: 2x10 AWG, 1x11.5 AWG

Dimensions: 476.25mm x 105.25mm x 76.70mm

Weight: 3.46 kg


Nautilus EU

Cena za kus	2290 Eur
-------------	----------

20 amp version

Cena za kus	2420 Eur
-------------	----------





Cardas Audio

Clear Beyond Power XL

Performance

To create Clear Beyond Power XL, we took our very popular Clear Beyond Power, and scaled everything up. Bigger conductors, better shielding and improved noise filtering. We then added yet another level of noise filtration, extending the path to ground to three times the length of the cable itself through a simple and graceful geometry that could only come from the mind of George Cardas.

This is our most sophisticated power cable ever, and is designed to provide the largest, most power hungry amplifiers with clean, high current, while also giving sensitive source components the stable, clear and noise free power they require for the absolute highest fidelity.

Terminated with our all new premium Cardas E-5 connectors, featuring silver/rhodium plated copper contact surfaces, Clear Beyond Power XL is designed for the most demanding electronics.

Standard Terminations: Soldered and crimped Cardas E-5 premium power plugs with silver/rhodium plated solid copper contacts. Terminated by hand in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free tin plated copper, gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a TPE jacket. Each conductor has multiple lay lengths and has it's own shield.

Geometry: Entire cable is double shielded with tin plated copper and magnet wire. Twisted triad mixed with PVC air tubes bound with FEP tape wrap. Super flexible TPR outer jacket.

Filtration: A toroidal ground filter is built into the termination and works in unison with a ground leg extension system.

Gauge: 3x9 AWG

Outside Diameter: 0.715"18.17mm



Clear Beyond Power XL

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	2990	3280	3570	3860	4140	4430	4720	4995	5290	5580

Štandardná odporúčaná minimálna dĺžka Power káblov je od 1,5m Každý ďalší meter : 580,-Eur



Cardas Audio



Clear Beyond Power

Performance

Designed to take current delivery and power filtration to the next level... Clear Beyond Power takes the "bigger is better" approach. Larger conductors deliver more power and our largest filter scrubs the power line clean. Don't let the size fool you, it's right at home powering front end components and giant mono block amplifiers. Completely neutral and transparent.

Standard Terminations: Soldered and crimped Cardas E-5 premium power plugs with silver/rhodium plated solid copper contacts. Terminated by hand in Bandon, Oregon.



Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free tin plated copper, gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE jacket.

Geometry: Double shielded with tin plated copper and magnet wire. Twisted triad mixed with PVC air tubes bound with FEP tape wrap. Super flexible TPR outer jacket.

Gauge: 3x10 AWG

Outside Diameter: 0.650"16.51mm

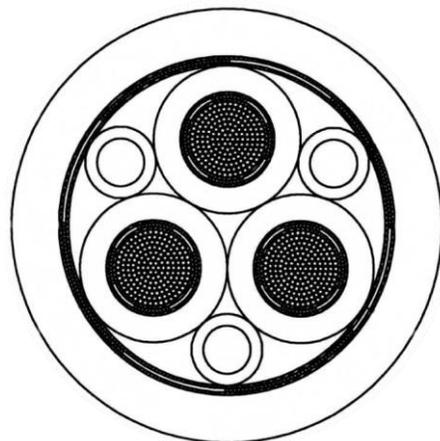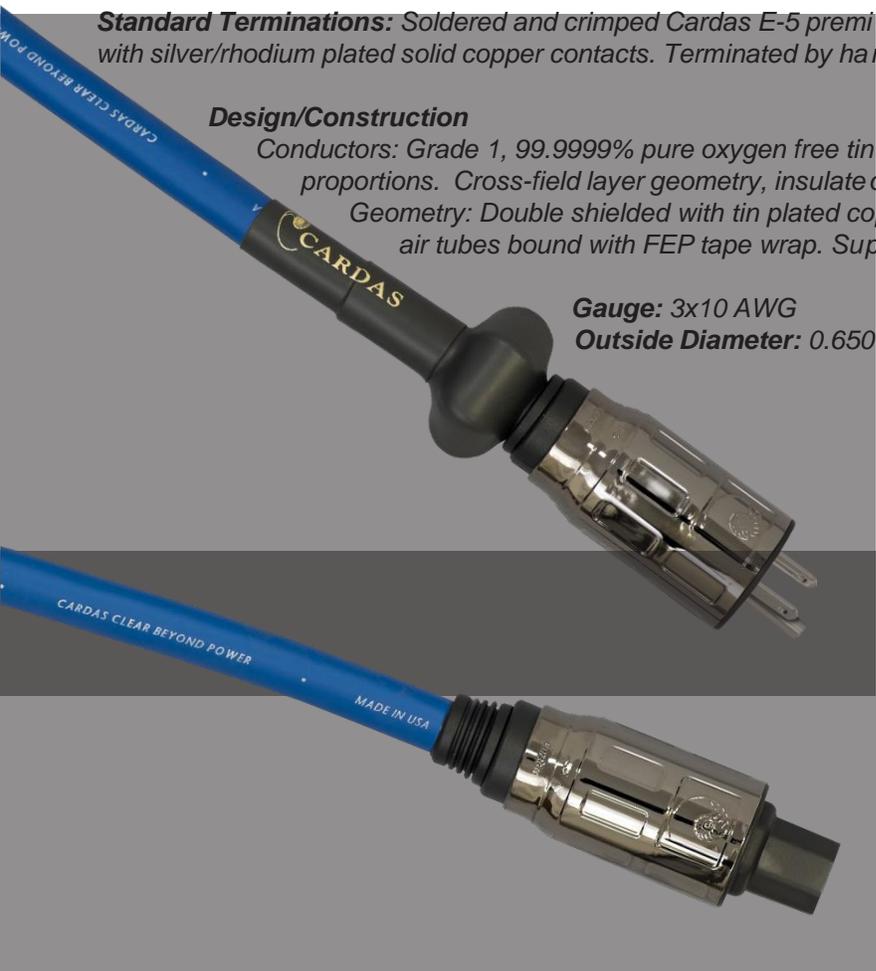

Clear Beyond Power

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	1290	1510	1730	1950	2160	2380	2600	2820	3040	3260

Štandardná odporúčaná minimálna dĺžka Power káblov je od 1,5m.
Každý ďalší meter : 440,-Eur

Clear Power

Performance

A reference level power cable that applies all the lessons learned over 25 years of developing high performance power cables; it was born from the ashes of the highly successful Golden Reference Power. Completely neutral tonal balance with additional filtering which increases dynamics. Large conductors make it suitable for those power hungry electronics and refined enough to power your more delicate source components.

Standard Terminations: Soldered and crimped Cardas power plugs with silver/rhodium plated solid copper contacts. Terminated by hand in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free copper, gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PFA jacket.

Geometry: Double shielded with tin plated copper and magnet wire. Twisted triad mixed with PE air tubes bound with PTFE tape wrap. Super flexible TPR jacket.

Gauge: 3x11.5 AWG

Outside Diameter: 0.610"/15.49mm



Clear Power

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	795	950	1095	1245	1395	1545	1690	1840	1990	2140

Štandardná odporúčaná minimálna dĺžka Power káblov je od 1,5m.

Každý ďalší meter : 300,-Eur



Cardas Audio

Clear Reflection Power



Performance

Clear Reflection Power brings modern Cardas conductor technology to a classic power cable design. Three 11.5 AWG Cardas litz conductors, double shield, and Cardas E-5 connectors make this a phenomenal value.

Standard Terminations: Soldered and crimped Cardas E-5 power plugs with silver/rhodium plated solid copper contacts. Terminated by hand in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free copper, gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PFA jacket.

Geometry: Double shielded with tin plated copper and magnet wire. Twisted triad mixed with PE air tubes bound with PTFE tape wrap. Super flexible TPR jacket.

Gauge: 3x11.5 AWG

Outside Diameter: 0.610"/15.49mm



Clear Reflection Power

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	590	730	865	995	1140	1280	1420	1560	1690	1830

Štandardná odporúčaná minimálna dĺžka Power káblov je 1,5m.
Každý ďalší meter : 280,-Eur



Cardas Audio

Clear Cygnus Power

Performance

Like a scaled down version of Clear Beyond Power, Cygnus Power features three well shielded conductors, and a passive noise filter. Although designed for use with source equipment and small-to-medium sized amplifiers, Cygnus Power has the current handling capacity for even larger, tube powered amps. As you would expect, Cygnus Power pairs well with the rest of the Cygnus lineup, and provides many of the benefits of it's higher-capacity siblings, at a fraction of the price.

Standard Terminations: Soldered and crimped Cardas power plugs with silver/rhodium plated solid copper contacts. Terminated by hand in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free tin plated copper, gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE jacket.

Geometry: Double shielded with tin plated copper and magnet wire. Twisted triad mixed with PVC air tubes bound with FEP tape wrap. Flexible TPR outer jacket.

Gauge: 3x13 AWG

Outside Diameter: 0.500"/12.7mm



Clear Cygnus Power

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	450	520	580	660	740	820	900	980	1060	1140

Štandardná odporúčaná minimálna dĺžka Power kábllov je 1,5m.
Každý ďalší meter : 160,-Eur



Parsec Power

Performance

Designed to reject and filter noise, Parsec Power borrows its conductors from the Clear Cygnus found higher up in the Cardas power cable line. Very flexible and suitable for both front end components and amplifiers. Brings your system to life with increased dynamics.

Standard Terminations: Soldered and crimped Cardas power plugs with silver/rhodium plated solid copper contacts. Terminated by hand in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free tin plated copper, gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE jacket.

Geometry: Double shielded with tin plated copper and magnet wire. Twisted triad mixed with PVC air tubes bound with FEP tape wrap. Super flexible TPR outer jacket.



Gauge: 3x14 AWG

Outside Diameter: 0.500"/12.7mm

Parsec Power

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m		4m		5m
Eur		345	399	459	519	575		690		810


Štandardná odporúčaná minimálna dĺžka Power káblov je 1,5m.

Každý ďalší meter : 115,-Eur





Cardas Audio

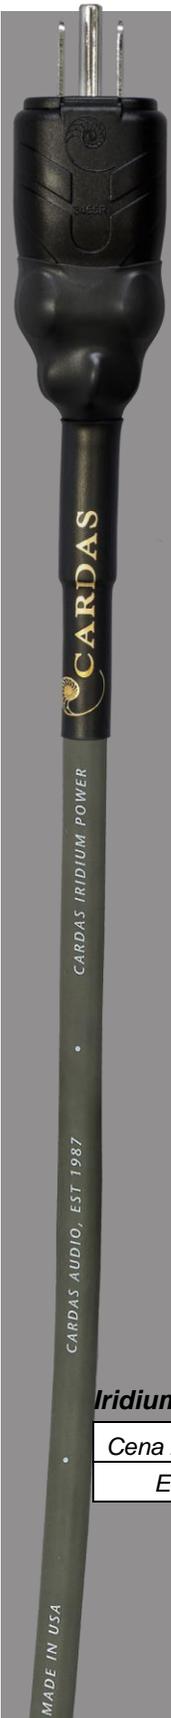

Iridium Power

Performance

Joining Iridium Speaker, Interconnect & Phono, Iridium Power brings high performance power delivery to the affordable end of our product line.

Shielded, with two Cardas 11.5 AWG Crossfield Conductors, PFA tape dielectric, and a toroidal filter, Iridium Power shares design features with our higher end power cables. Iridium Power is light & flexible, and comes terminated with our own Cardas 3455R Power Connectors. It has enough capacity to be used with almost any electronics from sensitive digital sources to power amplifiers.

Standard Terminations: Soldered and crimped Cardas power plugs with silver/rhodium plated solid copper contacts. Terminated by hand in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions.

Cross-field layer geometry, insulated in a PFA jacket.

Geometry: Double shielded using aluminum/mylar and tinned copper. Twisted pair with natural cotton filler bound with PTFE tape wrap. Super flexible Alcryn rubber jacket.

Gauge: 2x11.5 AWG

Outside Diameter: 0.490"/10.1mm



Iridium Power

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m		4m		5m
Eur		279	310	345	380	415		485		550

Štandardná odporúčaná minimálna dĺžka Power káblov je 1,5m.

Každý ďalší meter : 70,-Eur



Cardas Audio

Ground cable Zemniace káble

Performance

Grounding issues between components leads to noise and hum. A central grounding point eliminates these problems, leading to greater dynamics, improved spatial imaging, and a lowering of the noise floor - especially in environments with an excess of radio frequency and electromagnetic interference.

Cardas 17.5 AWG multi-stranded Litz conductor Ground Wires are ideal for use with the Cardas Nautilus Power Strip. A Cardas CAB Banana connects to the 4mm jack next to the IEC on the Nautilus. Several Cardas Ground Wires can be attached to the CAB Banana, and from there, to unused line-level connectors on your equipment (ie, an RCA or XLR jack). In addition, some audio equipment has ground points to which a spade can be attached.

Every sound system is unique, and Cardas Ground Wires can be purchased individually, or in sets. Any length is available, and Cardas Ground Wires are available with nearly any possible connector, allowing you to create a custom loom for grounding your system.

Standard Termination: Spade, Banana, XLR, RCA. Terminations will depend on your equipment's available connection points and the central grounding point that you're using.

To use the Nautilus Power Strip as your central ground point we suggest a Cardas CAB to which a single banana and up to three spades can be attached.


Cardas Ground Wires are compatible with other makes of ground boxes that use spade or banana connectors. Refer to the manufactures of your equipment if you have any question on how to properly attached a ground point.

Design/Construction


Conductors: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a clear PVC jacket.

Gauge: 1x17.5 AWG

Outside Diameter: 0.173"/4.40mm

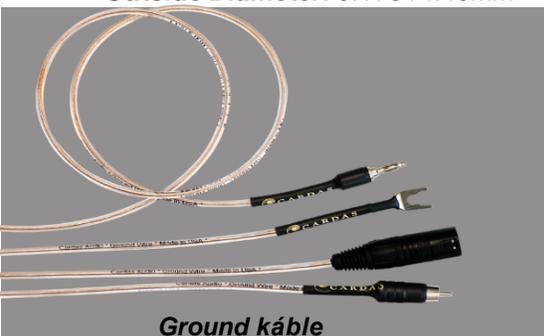

Ground káble

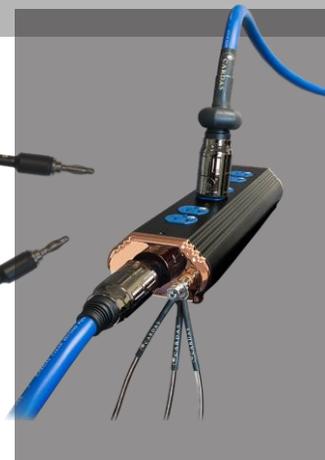

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m		4m		5m
Eur	139	155	175	190	210	225		260		295

Každý ďalší meter : 35,-Eur



Clear Beyond Headphone cable

Performance

One of our most challenging and extensive R&D projects has finally come to fruition. The Clear Beyond Headphone Cable project began due to the prodding from a handful of loyal customers who wanted to see us push the envelope, and outdo our venerable Clear Headphone Cable. This was no small task, and took several years. Clear Headphone Cable required the development of the first miniaturized concentric Matched Propagation Conductor, which presented challenges in both production and termination. Once those were conquered, we had a cable that expanded the performance of every headphone on which we tried it. But the idea of taking it to the next step was daunting. We began, naturally, by looking at ways to improve the conductor. Taking cues from Clear Beyond Interconnect, we refined the stranding and braiding, creating a finer arrangement of Grade 1 Ultra Pure Cardas Copper wire. This yielded notable improvements, but we knew we could take it further by doing something we've never done before - adding silver. Our all new Hybrid Metallurgy Matched Propagation Conductor features a 30 awg strand of Cardas Grade 1 Silver Wire, in addition to the many improvements we've made from the starting point of Clear Headphone Cable. The results are spectacular. As with Clear Headphone, Clear Beyond Headphone has two separate cables, one for each channel. Braided blue & black thread, and joined together with beautiful hardware to give it "the look" it deserves.

Standard Termination: There are too many options available to list them all. Please contact us to learn about the newest additions to our large selection of headphone terminations.

Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. 30 AWG Grade 1 Silver core. Cross-field layer geometry, insulated in an PTFE tape wrapped jacket.

Geometry: Concentrically wound two conductor flanked by anti-static fibers. Braided nylon outer jacket with copper plated hardware.

Gauge: 8 x 25.5 AWG + 4 x 30 AWG



Clear Beyond Headphone cable

Cena za set	0,5	1m	1.5m	2m	2.5m	3m	3.5m	4m	4,5m	5m
Eur	2150	2290	2430	2570	2700	2840	2980	3120	3260	3395

Každý ďalší meter : 280,-Eur



Clear Headphone cable

Performance

We took the Clear speaker cable and scaled it down to work for only the best headphones on the planet. This is a dual mono run (two completely isolated cables for left and right) just like a pair of speaker cables. Perfect for balanced or single ended operation. Completely neutral, detailed, with lifelike dynamics. This cable helps you to forget about the headphones and get lost in the music.

Standard Termination: Cardas 1/4" stereo and Sennheiser HD800. There are too many options available to list them all. Please contact us to learn about the newest additions to our large selection of headphone terminations.

Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in an FEP tape wrapped jacket. Geometry: Concentrically wound two conductor flanked by anti-static fibers. Braided nylon outer jacket.

Gauge: 8x26.5 AWG

Outside Diameter: 0.170"/4.31mm



Cardas 1/4" Stereo



1/8" Stereo



Dual 3 pin XLR



Single 4 pin XLR



90* 1/8" Stereo



Balanced Dual 1/8"



HD800



Audeze



HiFi Man



HD700



Balanced 2.5mm



Alpha Dog

Clear Headphone

Cena za set	0,5	1m	1.5m	2m	2.5m	3m	3.5m	4m	4,5m	5m
Eur	720	785	855	920	990	1060	1130	1200	1265	1335



Každý ďalší meter : 140,-Eur

Cardas CG XLR upgrade:

Retail	250
--------	-----



Clear Reflection Headphone cable

Performance

Clear Reflection HPC builds upon the successes from the more expensive dual mono geometry of Clear HPC. Matched Propagation conductors help to achieve very well balanced performance. Completely neutral and highly dynamic, a great match for virtually any headphone. Better detail, improved dynamics, and available with virtually any headphone connector on the market.

Standard Termination: There are too many options available to list them all. Please contact us to learn about the newest additions to our large selection of headphone terminations.

Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in an PTFE tape wrapped jacket.

Geometry: Concentrically wound two conductor flanked by anti-static fibers. Braided nylon outer jacket..



Gauge: 8 x 25.5 AWG

Outside Diameter: 0.180" / 4.57mm



Cardas 1/4" Stereo



1/8" Stereo



Dual 3 pin XLR



Single 4 pin XLR



90* 1/8" Stereo




Balanced Dual 1/8"




HD800



Audeze



HiFi Man



HD700



Balanced 2.5mm



Alpha Dog

Clear Light Headphone cable

Cena za set	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4,5m	5m
Retail	435	490	550	605	665	720	780	835	895	945



Každý ďalší meter : 115,-Eur

Cardas CG XLR's doplatok:

Eur	250
-----	-----



Cardas Audio

Parsec Headphone cable

Performance

Parsec HPC has all the legendary benefits Cardas is known for: richness, warmth, detail, non fatiguing, musical, etc.

The cable is very flexible and the rubber jacket slides nicely without snagging your clothing. The shielded star-quad design is one of our most versatile and successful products, very similar to our original headphone cable introduced back in 2003.

Standard Termination: Cardas 1/4" stereo and Sennheiser HD650. There are too many headphone and amp options available to list them all. Please contact us to learn about the newest additions to our large selection of headphone terminations.

Design/Construction


Conductors: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PFA jacket.

Geometry: Shielded Star-Quad 4 conductor, bound together in carbon impregnated FEP tape.

Super flexible Alcryn rubber jacket.

Gauge: 4x23.5 AWG

Outside Diameter: 0.204"/5.21mm

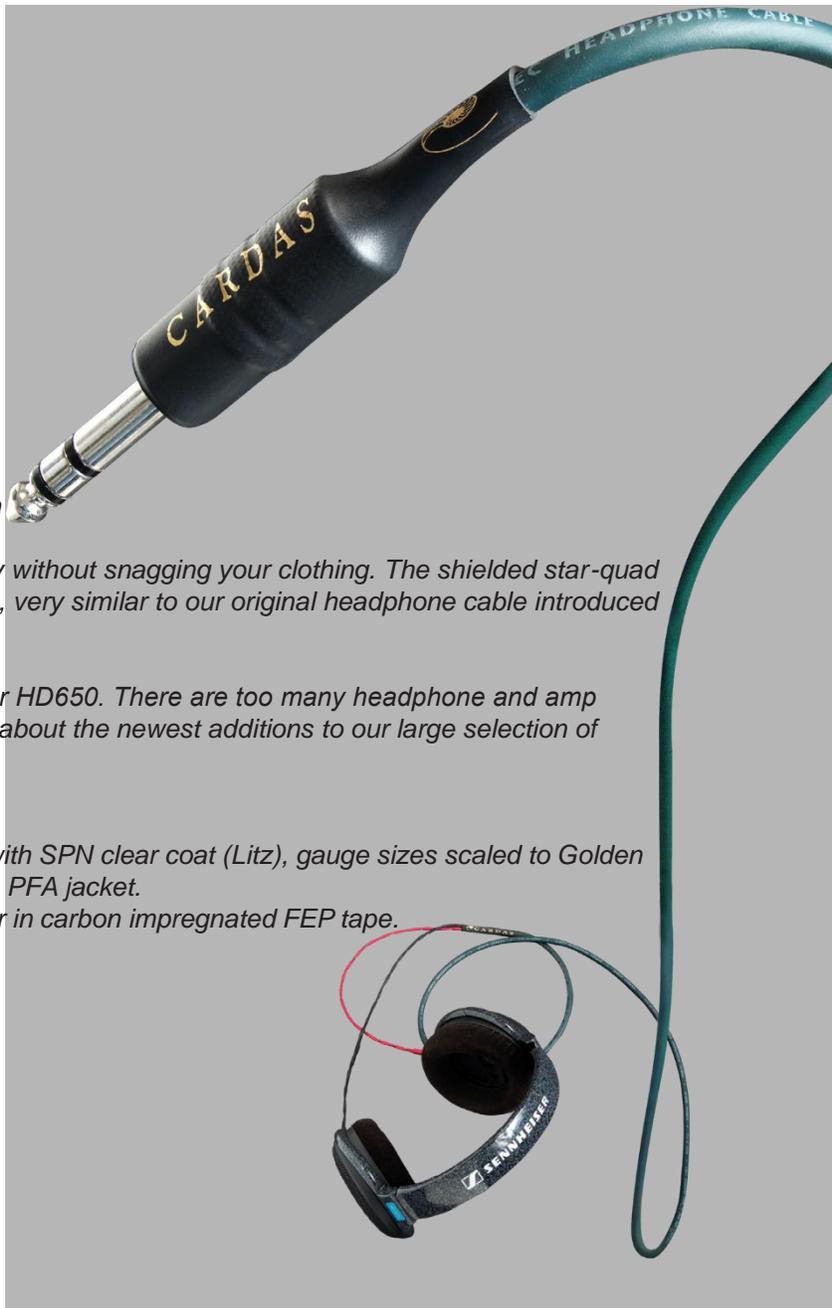

Parsec Headphone cable

Cena za kus	0,5m	1m	1.5m	2m	2.5m	3m	3,5m	4m		5m
Eur	205	230	260	290	320	350	380	410		470

Každý d'alší meter : 60,-Eur

PARSEC HEADPHONE CABLE • MADE IN USA • CARDAS AUDIO • PARSEC HEADPHONE CABLE • MADE




Cardas Audio

Personal Audio Interconnects

iLink

Performance

Literally cut from Cross Headphone cable but terminated with a right angle 1/8" stereo plug and stereo male RCA's. Perfect for playing music from your portable player on your home stereo.

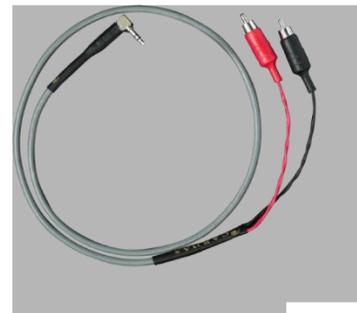

iLink cable

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3,5m	4m	4,5m	5m
Retail	195	215	245	270	300	330	360	390	415	450

For longer lengths:
Každý ďalší meter : 60,-Eur

Clear Light PAI 6" Posledné kusy

Performance

Literally cut from Clear Light headphone cable but terminated with right angle 1/8" stereo plugs on both ends.



Clear Light PAI 6"/15.24cm	
Cena za kus	219

Standard Termination: 1/8" stereo to 1/8" stereo

Cross PAI 6" Posledné kusy

Performance

Literally cut from Cross Headphone cable but terminated with right angle 1/8" stereo plugs on both ends.



Cross PAI 6"/15.24cm	
Cena za kus	145

Standard Termination: 1/8" stereo to 1/8" stereo

Headphone Interconnects

Performance

The original portable audio upgrade cable. Legendary Cardas sound and performance designed for compact portable products.


Standard Termination: 1/8" stereo to 1/8" stereo

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PFA jacket. Geometry: Shielded twisted triad 3 conductor, bound together in FEP tape with cotton fillers. PVC outer jacket.

Gauge: 2x25.5 AWG + 1x23.5AWG

Outside Diameter: 0.122"/3.09mm

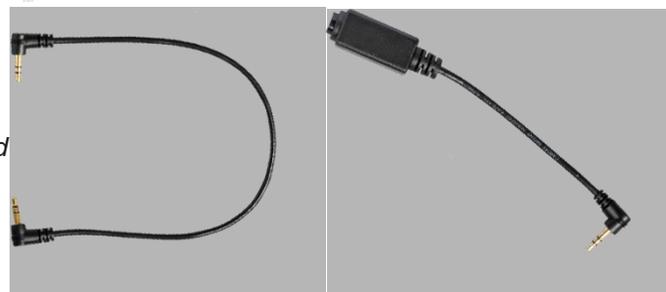

Cena za kus	0,15m	0.3m	1m	HPI-A
Retail	26	35	65	26

The only lengths available are listed above.



High End Slúchadlá do uší

EM5813

Cardas Ear Speakers are efficient, natural, musical, and are the result of years of meticulous design by George Cardas.

Components of the EM5813 were manufactured in Oregon, California, and The People's Republic of China. Custom alloys were sourced from Italy, Germany and the US, magnets from China, and thin film from Japan.

The EM5813 can be ordered with - or reterminated with - balanced connections for use with Astell & Kern or Pono.

Standard Terminations: Right angle 1/8" stereo

EM5813

Balanced EM5813

Cena za set	499 Eur
-------------	---------

Cena za set	559 Eur
-------------	---------



Cardas Audio Ltd. ~ 480 11th Street SE, Bandon ~ OR 97411

www.cardas.com




Cardas Audio

High End Slúchadlá do uší

A8 Ear Speaker 30th Anniversary Edition

An all new design, the A8 Ear Speakers feature a 10.85mm Ultra Linear, Contour Field, Dual Magnet Driver - producing brilliant highs and deep bass - but most importantly, it sounds musical. The new black chrome body incorporates a Golden Spiral curve, as with the EM5813. The lightweight, flexible cable has separate conductors for each channel and is now a continuous solid run from source to speaker. Available with balanced or custom configurations. Comes terminated with 3.5mm TRS standard.

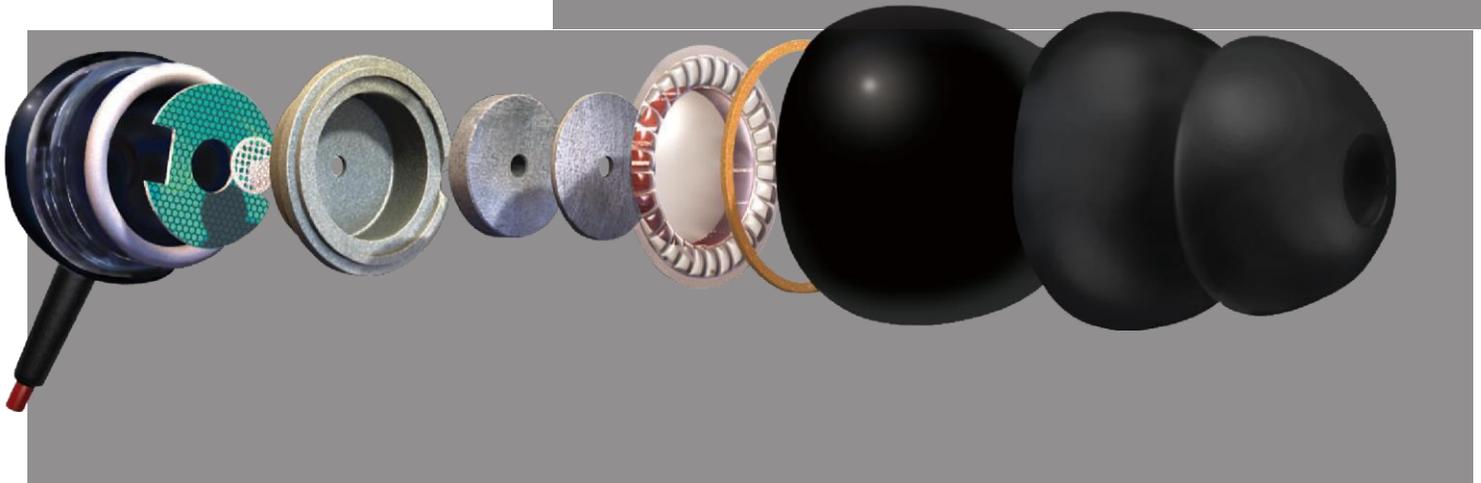

Specifications

Driver Type: Ultra Linear Dynamic 10.85mm
Impedance: 32 ohms
Sensitivity: 110 db
Isolation: -20 db
Connector Type: 1/8" TRS or balanced
Cable: Golden ratio, 99.99% pure Litz copper
Cable length: 46"/116cm
Weight: 31.2 grams including cable
Warranty: 1 year, cosmetics 30 days

A8

Cena za set	419 Eur
-------------	---------



Cardas Audio



Clear AES/EBU

Performance

The use of our Matched Propagation technology in digital cables has been nothing short of a game changer for digital audio transmission. More open, more dynamic, and completely neutral tonal balance. This is a reference level AES/EBU cable that compromises nothing.

Standard Terminations: Cardas CG XLR's. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and range from 41 AWG to 39 AWG. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket.

Geometry: Equilateral triad 3 conductors with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Specific geometry to achieve the 110 ohm AES/EBU standard. Finished in an ultra soft extruded TPR jacket.

Gauge: 3x25.5AWG

Outside Diameter: 0.355"/9.01mm



Clear Digital AES/EBU

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	920	1035	1150	1265	1380	1495	1495	1725	1840	1960

Každý ďalší meter : 230,-Eur



Cardas Audio

Clear Digital SPDIF / Coax



Performance

When you need a 75 ohm coaxial digital cable for your high-end digital playback, look no further. Clear Digital uses our flagship Matched Propagation conductors to transfer your digital content quickly and accurately. It's the most neutral, detailed, and revealing coax cable we have ever produced. Designed to compliment the best digital equipment on the market, this will extract every last detail.

Standard Terminations: Cardas SRCA or BNC. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and range from 41 AWG to 39 AWG. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket.
Geometry: Coaxial single conductor with anti-static LDPE air-tubes bound with PTFE tape wrap. Finished in an ultra soft extruded TPR jacket

Gauge: 1x25.5 AWG

Outside Diameter: 0.350"/8.89mm



Clear Digital SPDIF Coax

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	920	1035	1150	1265	1380	1495	1610	1725	1840	1960

Každý ďalší meter : 230,-Eur



Clear High Speed Serial Buss (USB)

Performance

Clear High Speed Serial Buss takes our Clear Serial Buss USB cable and adds a special high performance data cable using silver-plated conductors. Each conductor pair in both cables is discreetly shielded, and each cable has its own double-shield. This ultra-premium USB cable adds depth & realism, and improved imaging to your digital system. A noticeable improvement over our already high performing Clear Serial Buss. Clear High Speed Serial Buss USB is ideal for use with high resolution digital audio.

Standard Terminations: USB A to B. Some custom terminations available. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket. Solid core copper silver plated data conductors.

Geometry: Dual asymmetrical star-quad 8 conductor. Signal carrying conductors are a shielded twisted pair. Power and signal conductors are bound with PFA tape. Final shield is aluminum/mylar, tin plated copper and magnet wire. Outer jacket is TPR.

Gauge: 2x25.5 AWG + 2x21.5 AWG + 23.5 AWG + 30 AWG
Outside Diameter: Approximately 0.453"/11.50mm




Clear High Speed Digital USB

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	495	575	660	740	820	900	980	1060	1140	1220

Každý d'alší meter : 160,-Eur



Cardas Audio

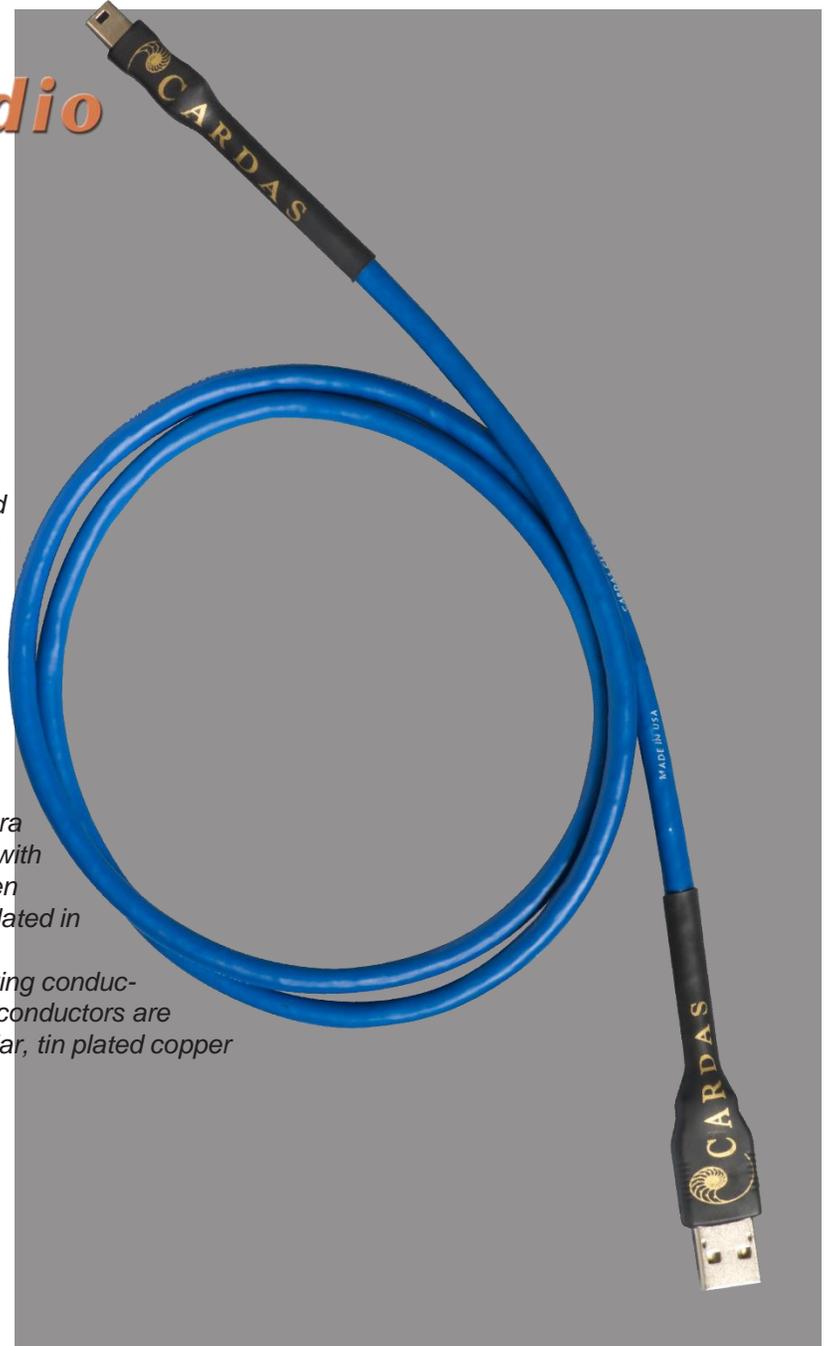

Clear USB

Performance

Cardas Clear USB is a musically neutral cable and sounds the same at any usable length. Clear USB is optimized for constant transfer impedance rather than a full wave characteristic impedance.

Standard Terminations: USB A to B. Some custom terminations available. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket.

Geometry: Asymmetrical star-quad 4. Signal carrying conductors are a shielded twisted pair. Power and signal conductors are bound with PFA tape. Final shield is aluminum/mylar, tin plated copper and magnet wire. Outer jacket is TPR.

Gauge: 2x25.5 AWG + 2x21.5 AWG

Outside Diameter: 0.220"/5.58mm

Clear Digital USB

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	249	289	329	369	409	449	489	529	569	609

Každý ďalší meter : 80,-Eur



Cardas Audio



Parsec Digital

Performance

Quite possibly the best value in digital cables, Parsec Digital is detailed, smooth, and musical. The cable is light, flexible and at home in almost any digital system.

Standard Terminations: Cardas GRMO or BNC.
Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), Gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a PTFE jacket.

Geometry: Coaxial with low density polyurethane air-tubes bound together in FEP tape to suspend the aluminized polyester and tin plated copper spiral shielding away from the conductors. Specific geometry achieves 75 ohms.


Gauge: 1x20.5 AWG
Outside Diameter: 0.345"/8.76mm



Parsec Digital

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	129	175	220	265	310	355	405	445	495	540

Každý ďalší meter : 95,-Eur

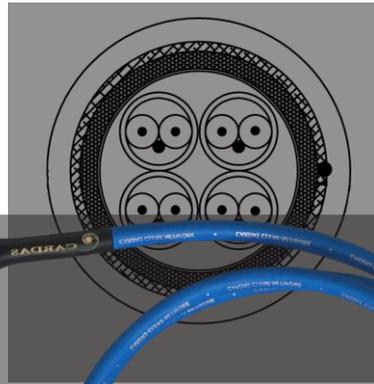

Clear Network CAT-7

Performance

With the advent of network hard drives & high(er)-resolution streaming services, the demand for higher quality ethernet cables has exploded. Who wouldn't want increased speed, increased bandwidth, and less noise?


Standard Terminations: Telegartner RJ45. Hand terminated in Bandon, Oregon.

Design/Construction

Conductors: Grade 1, 99.9999% pure oxygen free copper.
Geometry: Arranged in shielded pairs, each pair with its own drain wire. The bundle of pairs is wrapped in a foil shield, and then a braided shield. Jacketed in flexible TPR.

Gauge: 8x24AWG

Outside Diameter: 0.315"/8.01mm

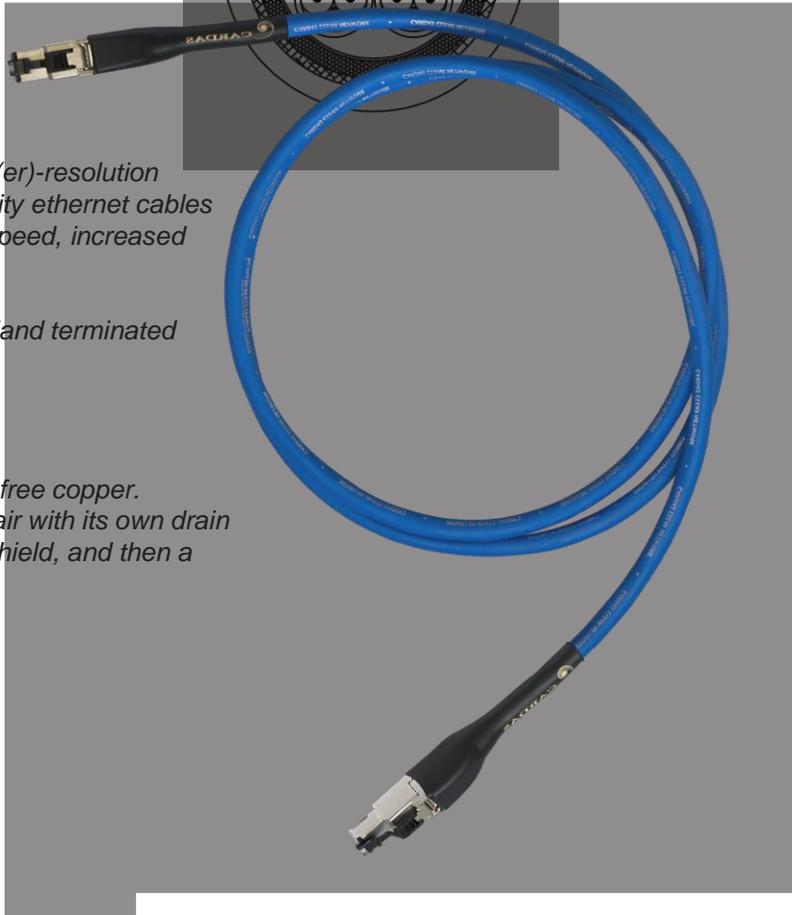

Clear Network CAT7 Ethernet

Cena za kus	0.5m	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m
Eur	299	345	395	440	485	530	575	625	670	715

Každý ďalší meter : 95,-Eur





Cardas Audio

Clear Beyond Phono X2

Performance

Clear Beyond Dual Phono has been a “secret menu item” for a while. We were asked to prepare a pair of Clear Beyond Interconnects for use with a 5-pin DIN tonearm in an extreme analog system being shown at the Munich High End Show. Then word spread, and those in the know fell in love with it. Now Clear Beyond Dual Phono has escaped into the marketplace.

A single run of Clear Beyond Interconnect, with multiple shields, and eight 26.5 AWG Matched Propagation Conductors, is a top performing phono cable. Some vinyl playback systems, however, benefit from a dual run of interconnects. That’s not a problem when your turntable has RCA outputs. But if your tonearm has a DIN connector, you’re typically limited to a consolidated phono cable.

Custom terminations including Cardas R-DIN and SME 90° DIN connections are available.

Standard Terminations: Cardas S-DIN to SRCA. Hand terminated in Bandon, Oregon.


Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and range from 47 AWG to 39 AWG. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket.

Geometry: Star-Quad 4 conductors with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Outer layer uses PTFE air-tubes scaled 1.618 times larger than the core tubes to suspend the composite shield of tinned copper and magnet wire away from the signal carrying conductors. Finished in an ultra soft extruded TPR jacket.

Gauge: 8x26.5 AWG

Outside Diameter: 0.511”/13mm

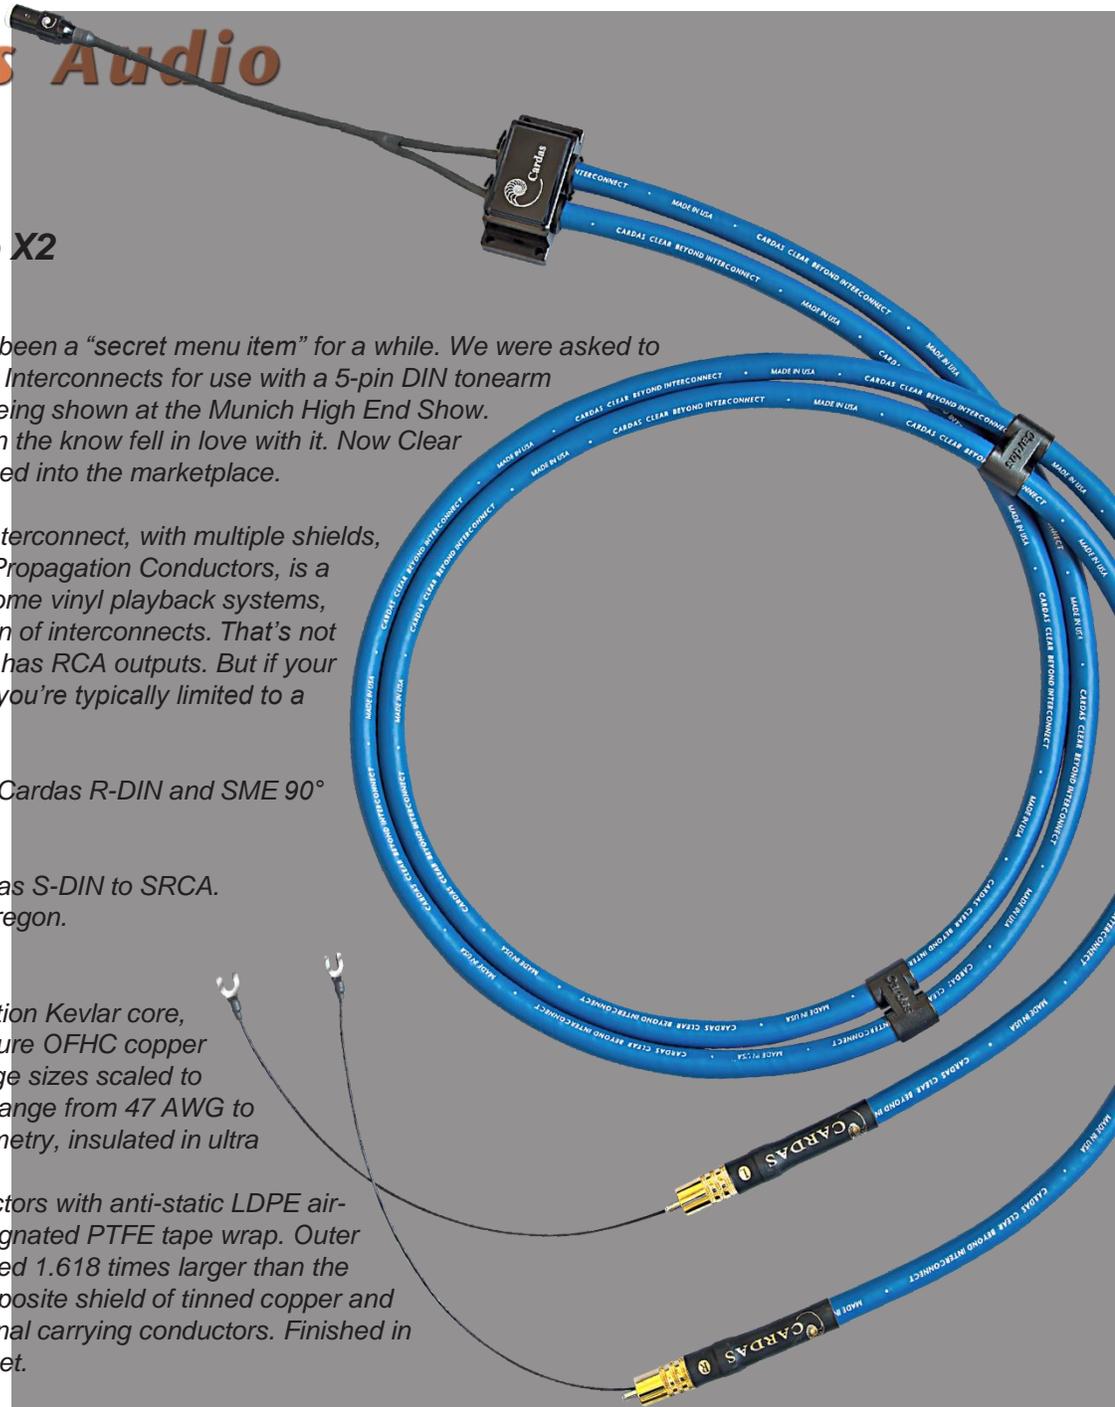

Clear Beyond Phono X2

Cena za set	0.5m	0.75m	1m	1.25m	1.5m	1.75m	2m	2.25m	2.5m	2.75m
Eur	4840	5365	5890	6410	6940	7460	7980	8510	9030	9550

Každý ďalší meter : 2090,-Eur



Cardas Audio

Clear Beyond Phono

Performance

Clear Beyond Phono, a marvel of modern cable design, features our most advanced Matched Propagation Conductors. Clear Beyond Phono brings noteworthy improvements in spatial imaging, dynamics, and low frequency impact while retaining the classic Cardas musicality.

Clear Beyond Phono builds on over 30 years of Cardas Audio's relentless dedication to the perfection of high performance cables. More than anything, Clear Beyond Phono is musical. Tonal balance is completely neutral with unsurpassed speed and transparency. Each is made to order and hand terminated only by our senior technicians.

Custom terminations including Cardas R-DIN and SME 90° DIN connections are available.


Standard Terminations: Cardas S-DIN to SRCA or RCA to RCA. Hand soldered in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and range from 47 AWG to 39 AWG. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket. Geometry: Star-Quad 4 conductors with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Outer layer uses PTFE air-tubes scaled 1.618 times larger than the core tubes to suspend the composite shield of tinned copper and magnet wire away from the signal carrying conductors. Finished in an ultra soft extruded TPR jacket.

Gauge: 4x26.5 AWG

Outside Diameter: 0.511"/13mm

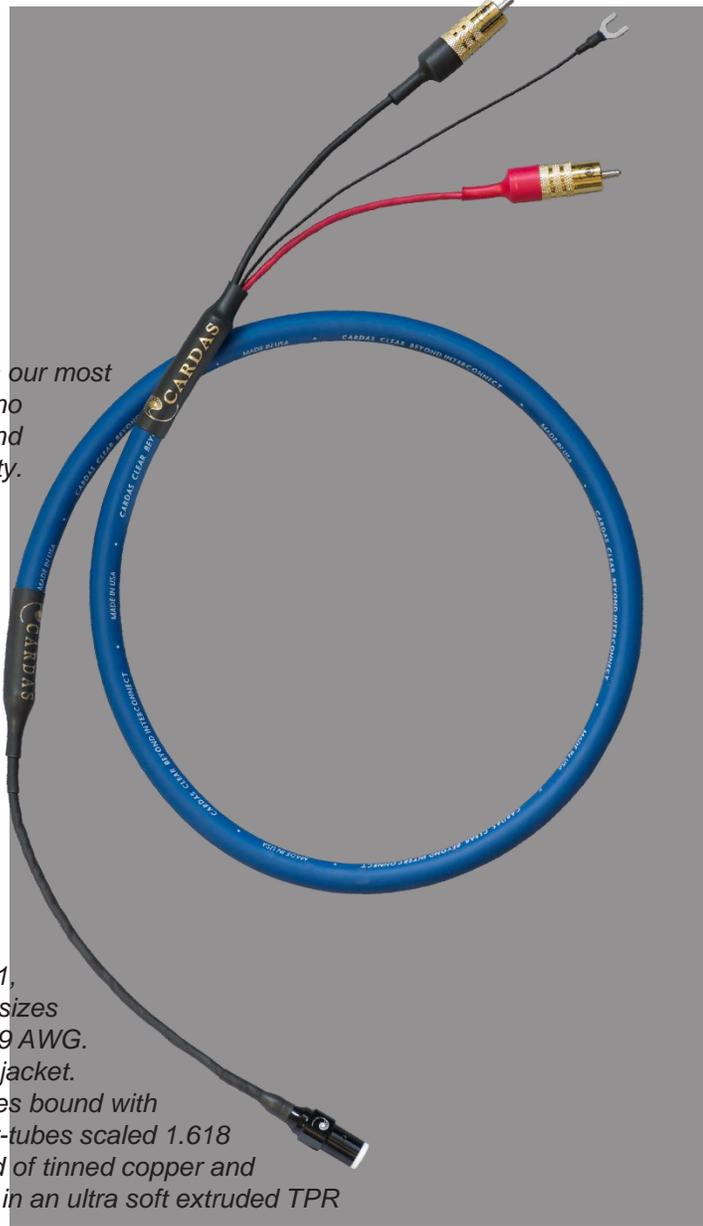


Clear Beyond Phono

Cena za set	0.5m	0.75m	1m	1.25m	1.5m	1.75m	2m	2.25m	2.5m	2.75m
Eur	2270	2480	2680	2880	3080	3280	3480	3680	3880	4080

Každý ďalší meter : 805,-Eur



Cardas Audio

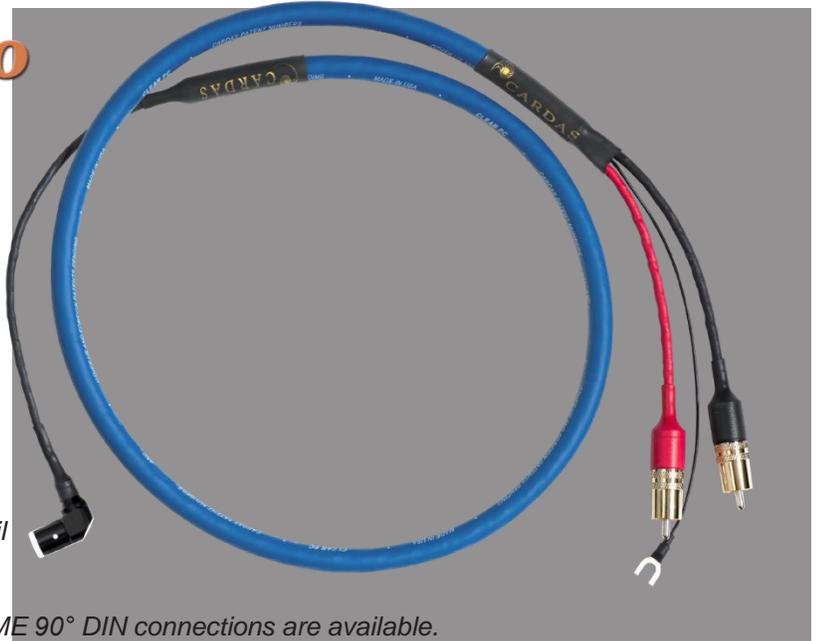

Clear Phono

Performance

Completely neutral and dynamic. Superb high frequency extension and speed. Our flagship phono cable is intended for reference level systems in acoustically neutral listening rooms. Perfect control over the entire frequency range. Extracts every detail and remains musical, never fatiguing.

Custom terminations including Cardas R-DIN and SME 90° DIN connections are available.

Standard Terminations: Cardas S-DIN to Cardas SRCA, or RCA to RCA. Hand soldered in Bandon, Oregon.

Design/Construction

Conductors: Matched Propagation Kevlar core, ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and range from 41 AWG to 39 AWG. Cross-field layer geometry, insulated in ultra thin extruded PTFE jacket.

Geometry: Dual mono twisted pair conductors with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Outer layer uses PTFE air-tubes scaled 1.618 times larger than the core tubes to suspend the composite shield of 42 AWG tinned copper and magnet wire away from the signal carrying conductors. Finished in an ultra soft extruded TPR jacket.

Gauge: 4x25.5 AWG

Outside Diameter: 0.418"/10.6mm

Clear Phono

Cena za set	0.5m	0.75m	1m	1.25m	1.5m	1.75m	2m	2.25m	2.5m	2.75m
Eur	1340	1520	1690	1870	2050	2230	2400	2580	2760	2940

Každý ďalší meter : 715,-Eur

Clear Cygnus Phono

Performance

Clear Cygnus Phono benefits greatly from the latest developments in the Clear product line, including a more economical version of Clear Beyond Interconnect's air-tube suspension. Clear Cygnus is detailed without any hint of harshness and has great low frequency performance. Clear Cygnus will help bring your analog to life. If you want Cardas musicality but with a neutral tonal balance, look no further.

Custom terminations including Cardas R-DIN and SME 90° DIN connections are available.

Standard Terminations: Cardas S-DIN to Cardas GRMO, or RCA to RCA. Hand soldered in Bandon, Oregon.


Design/Construction

Conductors: Matched Propagation Kevlar core, Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in double layered PTFE tape wrapped jacket.

Geometry: Star-Quad 4 conductor, with anti-static LDPE air-tubes bound with carbon impregnated PTFE tape wrap. Outer layer uses PTFE air-tubes scaled 1.618 times larger than the core tubes to suspend the composite shield of tinned copper and magnet wire away from the signal conductors. Finished in an ultra soft extruded TPR jacket.

Gauge: 4x25.5 AWG

Outside Diameter: 0.384"/9.76mm

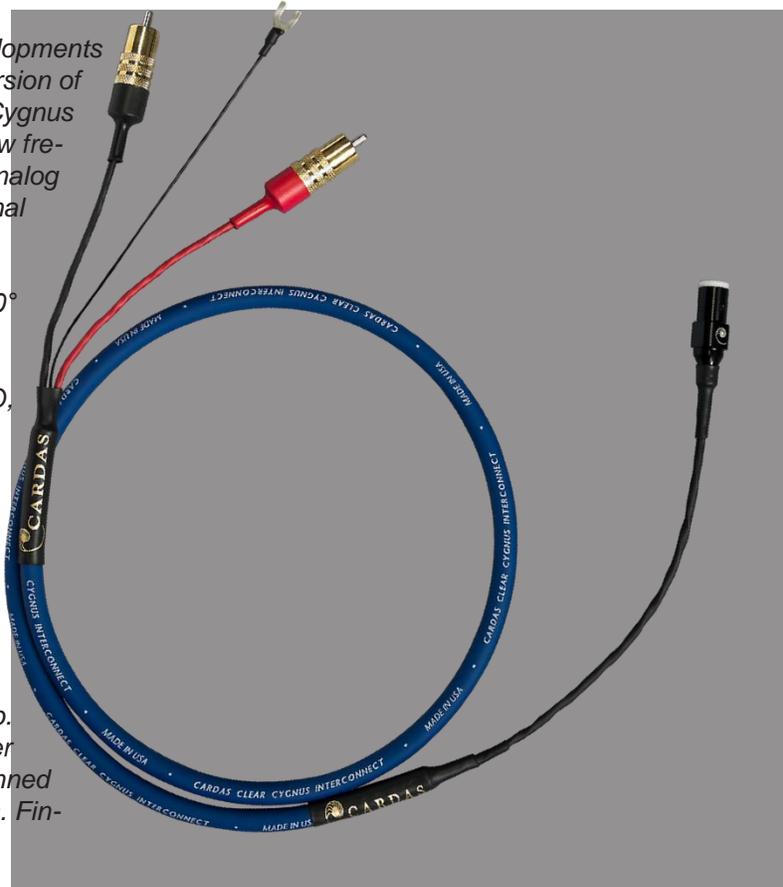

Cygnus Phono

Cena za set	0.5m	0.75m	1m	1.25m	1.5m	1.75m	2m	2.25m	2.5m	2.75m
Eur	530	580	635	690	750	810	865	920	980	1035

Každý ďalší meter : 230,-Eur



Cardas CG XLR doplatok:

Cena za pár	250



Cardas Audio

Iridium Phono

Performance

Looking for a rich, non-fatiguing, musical cable for your analog playback that doesn't break the bank? Look no further. Iridium Phono brings that classic analog sound with warmth and richness without sacrificing balance and detail.

Standard Terminations: Cardas S-DIN-E to Cardas RCA's, or RCA to RCA. Hand soldered in Bandon, Oregon.


Design/Construction

Conductors: Grade 1, 99.9999% pure OFHC copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions. Cross-field layer geometry, insulated in a FEP jacket.

Geometry: Shielded Star-Quad 4 conductor bound together in PTFE tape. Hybrid shield combines a spiral of tin plated copper and a carbon impregnated PTFE tape. Finished in an ultra soft and flexible extruded TPR jacket.

Gauge: 4x24.5 AWG

Outside Diameter: 0.300"/ 7.62mm

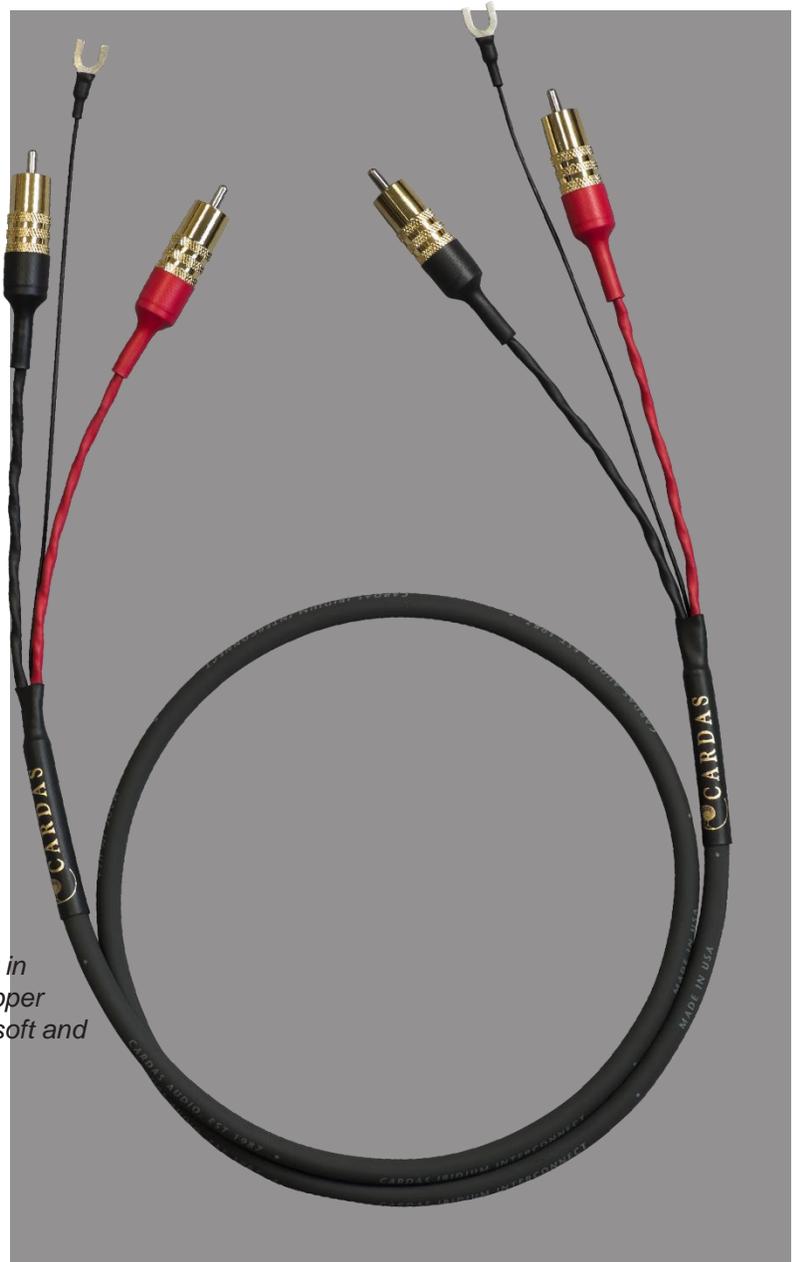

Iridium Phono

Cena za set	0.5m	0.75m	1m	1.25m	1.5m	1.75m	2m	2.25m	2.5m	2.75m
Eur	199	219	245	265	289	310	335	360	380	405

Každý ďalší meter : 95,-Eur

R-DIN (90° DIN plug)



Cardas Audio Ltd. ~ 480 11th Street SE, Bandon ~ OR 97411
www.cardas.com



LP Sweep Record
P47.9

Cena za kus
37

Description: The Cardas LP **Frequency Sweep and Burn-in Record** is a unique tuning tool for system set-up, diagnostics and maintenance. It was produced by George Cardas and mastered by Stan Ricker. LP **The Sweeper**, in addition to the standard tones, includes relative and absolute polarity checks, vocal channel identification and frequency sweeps that ultrasonically clean the cartridge stylus and degauss the entire system. And, locked, pink noise grooves that repeat endlessly, blank pla-teaus, even a sync label to check platter speed.

All on a LP 180 gram pressing with a smiling Stan cover.


SRCA SS
 P32.29

Cena za kus
115

Description: Top of the line, signature series, solderable male RCA with spring tensioner for uncompromising contact strength. Threaded cable entry allows the use of adapters for 11mm and 13mm cable diameters. Gold plated brass screw on outer cover with screen printed logo.

Base metal: High copper content, non-magnetic brass.

Contact Surface: Silver/rhodium

Cable opening: 9.5mm/0.37"


XRCA 11mm
 P42.19

Cena za kus
5,50

Description: Adapts the SRCA SS from the standard 9mm cable opening to fit 11mm diameter cable.

Base metal: High copper content, non-magnetic brass.

Plating: Nickel

Cable opening: 11mm/0.43"


XRCA 13mm
 P42.20

Cena za kus
5,50

Description: Adapts the SRCA SS from the standard 9mm cable opening to fit 13mm diameter cable.

Base metal: High copper content, non-magnetic brass.

Plating: Gold

Cable opening: 13mm/0.51"


GRMO
 P32.9

Cena za kus
59

Description: High performance solderable male RCA. Gold plated screw on outer cover. Same design as the flagship SRCA but without the spring tensioner and threaded cable entry.

Base metal: High copper content, non-magnetic brass.

Contact Surface: Silver/rhodium

Cable opening: 8.6mm/0.33"


SLVR SS
 P32.19

Cena za kus
56

Description: High performance solderable male RCA. Silver plated screw on outer cover with screen printed logo. Same design as the flagship SRCA but without the spring tensioner and threaded cable entry.

Base metal: High copper content, non-magnetic brass.

Contact Surface: Bare Silver

Cable opening: 8.6mm/0.33"


GRCM
 P32.6

Cena za kus
37

Description: High performance solderable male RCA. Gold plated screw on outer cover threads on from the back. Designed for smaller cables and applications where space is limited.

Base metal: High copper content, non-magnetic brass.

Contact Surface: Silver/rhodium

Cable opening: 7.77mm/0.30"


GRCM 6mm
 P32.4

Cena za kus
37

Description: High performance solderable male RCA. Gold plated screw on outer cover threads on from the back. Designed for smaller cables and applications where space is limited.

Base metal: High copper content, non-magnetic brass.

Contact Surface: Silver/rhodium

Cable opening: 6.0mm/0.23"


GRFA Short
P36.16

Cena za kus
40

Description: Chassis mount solderable female RCA. Mounts to chassis thickness of 0.125"/3.18mm or less. Comes with red and white 0.625"/15.87mm outside diameter shoulder washers for channel identification. Standard mounting nut is gold plated brass 0.138"/3.51mm thick. Ideal mounting hole diameter 0.455"/11.55mm.

Base metal: High copper content, non-magnetic brass.

Plating: Silver/rhodium

Termination: Solder cup for positive, chassis/notch for negative.


GRFA Long
P36.6

Cena za kus
44

Description: Chassis mount solderable female RCA. Mounts to chassis thickness of 0.342"/8.70mm or less. Comes with red and white 0.625"/15.87mm outside diameter shoulder washers for channel identification. Standard mounting nut is gold plated brass 0.138"/3.51mm thick. Ideal mounting hole diameter 0.455"/11.55mm.

Base metal: High copper content, non-magnetic brass.

Plating: Silver/rhodium

Termination: Solder cup for positive, chassis/notch for negative.


GRFA DBL PRT G
P36.3

Cena za pár
40

Description: PCB double female RCA. Mounts to chassis thickness of 0.228"/5.80mm or less. Comes with red and white 0.625"/15.87mm outside diameter shoulder washers for channel identification. Standard mounting nut is gold plated brass 0.138"/3.51mm thick. Ideal mounting hole diameter 0.455"/11.55mm.

Base metal: High copper content, non-magnetic brass.

Plating: Gold

Termination: PCB


GRFA PRT
P36.14

Cena za kus
44

Description: PCB female RCA. Mounts to chassis thickness of 0.170"/4.32mm or less. Comes with red and white 0.625"/15.87mm outside diameter shoulder washers for channel identification. Standard mounting nut is gold plated brass 0.138"/3.51mm thick. Ideal mounting hole diameter 0.455"/11.55mm.

Base metal: High copper content, non-magnetic brass.

Plating: Silver/rhodium

Termination: PCB


GRFA PSR2 M
P36.20

Cena za kus
44

Description: PCB female RCA. Mounts to chassis thickness of 0.5"/12.72mm or less. Comes with red and white 0.625"/15.87mm outside diameter shoulder washers for channel identification. Detachable metal washer for backing plate. Standard mounting nut is gold plated brass 0.188"/4.8mm thick. Ideal mounting hole diameter 0.455"/11.55mm.

Base metal: High copper content, non-magnetic brass.

Plating: Silver/rhodium

Termination: PCB


GRFA PSA
P36.30

Cena za kus
44

Description: PCB female RCA. Mounts to chassis thickness of 0.5"/12.72mm or less. Comes with red and white 0.625"/15.87mm outside diameter shoulder washers for channel identification. Detachable metal washer for backing plate. Standard mounting nut is gold plated brass 0.188"/4.8mm thick. Ideal mounting hole diameter 0.455"/11.55mm.

Base metal: High copper content, non-magnetic brass.

Plating: Silver/rhodium

Termination: PCB


CTFA
P36.1/2

Cena za kus
17

Description: Chassis mount solderable female RCA. Mounts to chassis thickness of 0.225"/5.73mm or less. Comes with red or white 0.590"/15.0mm outside diameter shoulder washers. Ideal mounting hole diameter 0.37"/9.50mm. Comes with a gold plated solderable ground tab.

Base metal: Brass.

Plating: Silver/rhodium

Termination: Solder cup for positive, removable ground tab for ground

XLR konektory



CG FXLR
P37.3

Cena za kus
119

Description: Reference level cable mount female 3 pin XLR. Three piece threaded design with solderable pins. Fourth solder pin connects to XLR body. Red or black O ring channel indicator included. Fits cable up to 11mm OD.

Base metal: High copper content, non-magnetic brass.

Plating: Silver/rhodium

Termination: Solder cups

Cable opening: 11mm/0.433"



CG MXLR
P37.4

Cena za kus
119

Description: Reference level cable mount male 3 pin XLR. Three piece threaded design with solderable pins. Fourth solder pin connects to XLR body. Red or black channel indicator O ring included. Fits cable up to 11mm OD.

Base metal: High copper content, non-magnetic brass.

Plating: Silver/rhodium

Termination: Solder cups

Cable opening: 11mm/0.433"



CM FXLR
P37.2

Cena za kus
60

Description: Reference level chassis mount female 3 pin XLR. Two piece design with set screw. Convertible from PCB to solderable. Fourth solder pin connects to XLR body. Gold plated mounting cup.

Base metal: High copper content, non-magnetic brass.

Contact Surface: Silver/rhodium

Termination: Solder cups or PCB



CM MXLR
P37.1

Cena za kus
60

Description: Reference level chassis mount male 3 pin XLR. Two piece design with set screw. Convertible from PCB to solderable. Fourth solder pin connects to XLR body. Gold plated mounting cup.

Base metal: High copper content, non-magnetic brass.

Contact Surface: Silver/rhodium

Termination: Solder cups or PCB

BNC konektor



GRBNC S
P38.3

Cena za kus
25

Description: PCB female locking BNC. Mounts to chassis thickness of 0.149"/3.8mm or less. Comes with red and white 0.627"/15.95mm outside diameter washers for channel identification. Standard mounting nut is gold plated brass 0.157"/4.0mm thick. Ideal mounting hole diameter 0.472"/12.0mm.

Base metal: High copper content, non-magnetic brass.

Plating: Silver/rhodium

Termination: PCB



CGMS R XS
P35.20

Cena za kus
43

Description: Heavy duty spade milled from high purity billet copper. Fits 0.25"/6.3mm binding posts. Drilled solder hole to aid in termination. Has a slight angle of 13° for increased cable clearance. Maximum width of 12mm/0.47"

Base metal: High Purity Copper
Plating: Silver/rhodium
Termination: 7 AWG/4mm/0.157"



CGMS R M
P35.34

Cena za kus
43

Description: Heavy duty spade milled from high purity billet copper. Fits 0.25"/6.4mm binding posts. Drilled solder hole to aid in termination. Has a slight angle of 13° for increased cable clearance. Maximum width of 12mm/0.47"

Base metal: High Purity Copper
Plating: Silver/rhodium
Termination: 4 AWG/5.5mm/0.216"



CGMS R L
P35.33

Cena za kus
43

Description: Heavy duty spade milled from high purity billet copper. Fits 0.25"/6.4mm binding posts. Drilled solder hole to aid in termination. Has a slight angle of 13° for increased cable clearance. Maximum width of 12mm/0.47"

Base metal: High Purity Copper
Plating: Silver/rhodium
Termination: 2 AWG/6.90mm/0.271"



CGMS 9R XS
P35.29

Cena za kus
48

Description: Heavy duty spade milled from high purity billet copper. Fits 0.35"/9mm binding posts. Drilled solder hole to aid in termination. Has a slight angle of 13° for increased cable clearance. Maximum width of 16.25mm/0.64"

Base metal: High Purity Copper
Plating: Silver/rhodium
Termination: 7 AWG/4mm/0.157"



CGMS 9R M
P35.28

Cena za kus
48

Description: Heavy duty spade milled from high purity billet copper. Fits 0.35"/9mm binding posts. Drilled solder hole to aid in termination. Has a slight angle of 13° for increased cable clearance. Maximum width of 16.25mm/0.64"

Base metal: High Purity Copper
Plating: Silver/rhodium
Termination: 4 AWG/5.5mm/0.216"



CGMS 9R L
P35.27

Cena za kus
48

Description: Heavy duty spade milled from high purity billet copper. Fits 0.35"/9mm binding posts. Drilled solder hole to aid in termination. Has a slight angle of 13° for increased cable clearance. Maximum width of 16.25mm/0.64"

Base metal: High Purity Copper
Plating: Silver/rhodium
Termination: 2 AWG/6.90mm/0.271"



GRS U
P35.71

Cena za kus
16

Description: Stamped copper spade with solder tab to fit any size wire. Has a slight angle of 13° for increased cable clearance. Designed to fit large 9mm and standard 6mm binding posts. Maximum width of 14.2mm/0.559"

Base metal: High Purity Copper
Plating: Silver/rhodium
Termination: Solder tab


CCS 8
P35.70

Cena za kus
19,50

Description: Medium duty copper spade. Fits 9mm and 6mm binding posts. Designed to be crimped by hand but can also be soldered. Has a slight angle of 13° for increased cable clearance. Maximum width of 13.65mm/0.537"

Base metal: Copper
Plating: Silver/rhodium
Termination: 8 AWG/3.54mm/0.139"


CABD
P40.9

Cena za pár
90

Description: Dual banana plug with removable insulator. Standard 0.75" spacing. Gold binding nut for attaching spades or bare wire. Tapered hole at the back for soldering wire or stacking additional banana plugs. Spring loaded split tip for maximum contact surface area and retention.

Base metal: High copper content, non-magnetic brass
Plating: Silver/rhodium
Termination: 3 AWG/6mm/0.236"


CAB
P40.2

Cena za kus
45

Description: Single banana plug. Gold binding nut for attaching spades or bare wire. Tapered hole at the back for soldering wire or stacking additional banana plugs. Spring loaded split tip for maximum contact surface area and retention.

Base metal: High copper content, non-magnetic brass
Plating: Silver/rhodium
Termination: 3 AWG/6mm/0.236"


CABE
P40.15

Cena za kus
12

Description: Solderable single banana plug. Traditional spring loaded banana tip. Simple design can accommodate large or small wire.

Base metal: Non-magnetic brass
Plating: Nickel
Termination: 3 AWG/6.35mm/0.25"


CCMS C 1 XL
P35.42

Cena za kus
17

Description: Heavy duty spade milled from high purity billet copper. Fits 0.25"/6.4mm binding posts. Drilled solder hole to aid in termination. Has a slight angle of 13° for increased cable clearance. Maximum width of 12 mm/0.47"

Base metal: High Purity Copper
Plating: None
Termination: 2 AWG/6.90mm/0.271"



CCRR L
P33.26

Cena za pár konektorov
159

Description: Premium long binding post made from high purity copper bar stock. Posts and binding nuts plated with silver/rhodium. Designed to accept standard bananas, spades, and bare wire. 6.3mm/0.25" spades are ideal but can accommodate larger. Comes standard with dual black insulator with .5" recess on .75" centers.

Base metal: High purity copper
Plating: Silver/rhodium
Termination: Solder



CCRR S
P33.27

Cena za pár
144

Description: Premium short binding post made from high purity copper bar stock. Posts and binding nuts plated with silver/rhodium. Designed to accept standard bananas, spades, and bare wire. 6.3mm/0.25" spades are ideal but can accommodate larger. Comes standard with dual black insulator with .5" recess on .75" centers.

Base metal: High purity copper
Plating: Silver/rhodium
Termination: Solder



CCGR L
P33.23

Cena za pár
152

Description: Premium long binding post made from high purity copper bar stock. Posts plated with silver/rhodium, binding nuts are gold plated. Designed to accept standard bananas, spades, and bare wire. 6.3mm/0.25" spades are ideal but can accommodate larger. Comes standard with dual black insulator with .5" recess on .75" centers.

Base metal: High purity copper
Plating: Silver/rhodium
Termination: Solder



CCGR S
P33.71

Cena za pár
140

Description: Premium short binding post made from high purity copper bar stock. Posts plated with silver/rhodium, binding nuts are gold plated. Designed to accept standard bananas, spades, and bare wire. 6.3mm/0.25" spades are ideal but can accommodate larger. Comes standard with dual black insulator with .5" recess on .75" centers.

Base metal: High purity copper
Plating: Silver/rhodium
Termination: Solder



CCBP L
P33.46

Cena za pár
118

Description: Premium long binding post made from high purity copper bar stock. Posts and binding nut is raw bare copper. Designed to accept standard bananas, spades, and bare wire. 6.3mm/0.25" spades are ideal but can accommodate larger. Comes standard with dual black insulator with .5" recess on .75" centers.

Base metal: High purity copper
Plating: None
Termination: Solder



CCBP S
P33.67

Cena za pár
105

Description: Premium short binding post made from high purity copper bar stock. Posts and binding nut is raw bare copper. Designed to accept standard bananas, spades, and bare wire. 6.3mm/0.25" spades are ideal but can accommodate larger. Comes standard with dual black insulator with .5" recess on .75" centers.

Base metal: High purity copper
Plating: None
Termination: Solder



ACBP S
P33.6

Cena za pár
72

Description: Premium short binding post made from high copper content brass. Posts plated with silver/rhodium, binding nuts are gold plated. Designed to accept standard bananas, spades, and bare wire. 6.3mm/0.25" spades are ideal but can accommodate larger. Comes standard with dual black insulator with .5" recess on .75" centers.

Base metal: High purity copper
Plating: Silver/rhodium
Termination: Solder


CPBP CRS
P33.83

Cena za kus
96

Description: Cardas patented binding post system uses smaller amounts of metal and eliminates threads on conductive surfaces. The design sounds better and is CE compliant for EU import restrictions. Designed to be direct soldered. Posts accept 6.3mm spades but can accommodate 9mm also. Clamp can be modified to work with bananas.

Base metal: High purity copper

Plating: Silver/rhodium

Termination: Solder


CPBP KA
P33.8

Cena za kus
26

Description: Aluminum knob anodized black for the CPBP binding posts. Comes fitted with double rubber O ring grips.

Base metal: Aluminum

Plating: Hard anodized black

Thread pitch: .25/28


CPBP KAE
P33.64

Cena za kus
28

Description: Aluminum knob anodized black and engraved with the Cardas logo. Custom engraving is available. Fits the CPBP binding posts. Comes fitted with double rubber O ring grips.

Base metal: Aluminum

Plating: Hard anodized black

Thread pitch: .25/28


CPBP replacement knob
P33.37

Cena za kus
7

Description: Knurled black replacement knob. Screw can pass through the back side allowing greater flexibility with mounting screw length.

Base metal: Brass threaded insert

Thread pitch: .25/28


CPBP Clamp modified for bananas
P33.79

Cena za kus
13

Description: Insulator clamp drilled to accept banana plug. This modification allows the use of banana plugs with the patented binding post system.

Base metal: Brass threaded insert

Thread pitch: .25/28


SBPI (black or red)
P33.52/1

Cena za kus
6

Description: Single binding posts insulators fit standard Cardas binding posts. Flats on two sides are useful to prevent the post from spinning as you tighten the mounting nut. Dostupné a baleen červené, alebo čierne.


BPMP
P33.89

Cena za kus
13

Description: Binding post mounting plate. Fits all Cardas binding posts. Compact and effective for new builds or retrofits.

Base metal: Aluminum

Plating: Hard anodized black

E-5 20 amp IEC

P11.21

Cena za kus
239


Description: 20 amp IEC designed for large diameter power cables with heavy gauge conductors. The non-magnetic anti-resonant shell is plated and clear coated to help reject RFI/EMI noise. Not intended for use on wimpy power cables. Recommended cable diameter: 7.5mm/.29" to a maximum of 21.5mm/.84"

Base metal: Beryllium copper

Plating: Silver/rhodium

Termination: Standard screw clamp

E-5 15 amp IEC

P11.19

Cena za kus
239


Description: Standard 15 amp IEC designed for large diameter power cables with heavy gauge conductors. The non-magnetic anti-resonant shell is plated and clear coated to help reject RFI/EMI noise. Recommended cable diameter: 7.5mm/.29" to a maximum of 21.5mm/.84"

Base metal: Beryllium copper

Plating: Silver/rhodium

Termination: Standard screw clamp

E-5 USA

P10.38

Cena za kus
239


Description: Standard North American power plug designed for large diameter power cables with heavy gauge conductors. The non-magnetic anti-resonant shell is plated and clear coated to help reject RFI/EMI noise. Recommended cable diameter: 7.5mm/.29" to a maximum of 21.5mm/.84"

Base metal: Beryllium copper

Plating: Silver/rhodium

Termination: Standard screw clamp

E-5 Schuko

P10.43

Cena za kus
239


Description: European Schuko power plug designed for large diameter power cables with heavy gauge conductors. The non-magnetic anti-resonant shell is plated and clear coated to help reject RFI/EMI noise. Recommended cable diameter: 7.5mm/.29" to a maximum of 21.5mm/.84"

Base metal: Beryllium copper

Plating: Silver/rhodium

Termination: Standard screw clamp

**Nautilus
4181EU**
Cena za kus
85


Description: European Schuko, Outlet connector featured copper clips, designed for large diameter power cables with heavy gauge conductors, 10 AWG Solid Core or 11,5 AWG Multistranded Litz Conductor. The plated with Rhodium over Silver and clear coated to help reject. Amazing grip tension provides solid Contact and superb plug retention on the heaviest of cables. Recommended cable diameter: 15 – 10 AWG

Base metal: Beryllium copper **Plating:** Silver/rhodium

Termination: Standard screw clamp

Výhradný distribútor Cardas audio pre Slovenskú republiku :

Platan Audio
M.R. Štefánika 12
920 01 Hlohovec

Kontakt: Eduard Nemček
Email : platan@platanaudio.sk
WEB : www.platanaudio.sk

Mobil : 0905 409 802
Tel. HC : 033 7300531
Tel. predajňa BA:02 527 331 91


3455R 15 amp IEC
 P11.11

Cena za kus
85

Description: Standard 15 amp IEC with clamshell opening for easy access to terminals and a compact design to fit all types of electronics even ones with recessed power inlets. Fits cable diameters from 10mm/.39" to 18.5mm/.72" diameter.

Base metal: Beryllium copper
Plating: Silver/rhodium
Termination: Standard screw clamp


3455R USA
 P10.21

Cena za kus
85 Nie je v ponuke v SR

Description: Standard North American wall plug with clamshell opening for easy access to terminals and a compact design to fit all types of installations. Fits cable diameters from 10mm/.39" to 18.5mm/.72" diameter.

Base metal: Beryllium copper
Plating: Silver/rhodium
Termination: Standard screw clamp


3455RS Schuko
 P10.24

Cena za kus
85

Description: Standard European Schuko wall plug with clamshell opening for easy access to terminals and a compact design to fit all types of installations. Fits cable diameters from 10mm/.39" to 18.5mm/.72" diameter.

Base metal: Beryllium copper
Plating: Silver/rhodium
Termination: Standard screw clamp

Headphone connectors / Slúchadlové konektory


HD800 connectors
 P39.13

Cena za pár
96

Description: Cable mount Sennheiser HD800 connectors. Sold in sets of two.

Base metal: Brass
Plating: Gold
Termination: Solder


HPSC (HD650)
 P39.17

Cena za pár
20

Description: Cardas HPSC connectors offer a perfect fit for Sennheiser HD600/650 replacement cables. Molded in red and black, these connectors feature easy access for soldering and built-in strain relief. Sold in pairs one color each. Should also fit HD265, 525, 535, 545, 565, 565II, 580. Sold in sets of two.

Base metal: High copper content, non-magnetic brass.
Plating: Silver/rhodium
Termination: Solder

Obrázok ešte
 nedostupný

4pin FXLR-GRQ SS
 P42.105 150.00

Cena za kus **180**

Description: Male 1/4"/6.3mm stereo to female 1/8"/3.5mm mini. High quality Cardas GRQ SS mated to a Neutrik TRS mini plug using Cardas chassis wire and solder. Allows the use of standard 3.5mm stereo plugs to be used on the larger 6.3mm stereo inputs.

Base metal: High copper content, non-magnetic brass
Plating: Silver/rhodium
Termination: Assembled by hand in Bandon Oregon


CGA FXLR-FRCA (pair)
P42.2

Cena za pár
299

Description: Female XLR to Female RCA. The CGA adapters are made from thick high quality brass to help block RFI and EMI. Allows the use of RCA and XLR when needed. Standard configuration is pin 2 hot, pin 1 grounded to RCA, pin 3 floating. Custom versions are available if you use your pleases and thankyoues. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Assembled by hand in Bandon Oregon


CGA MXLR-FRCA (pair)
P42.3

Cena za pár
299

Description: Male XLR to Female RCA. The CGA adapters are made from thick high quality brass to help block RFI and EMI. Allows the use of RCA and XLR when needed. Standard configuration is pin 2 hot, pins 1 and 3 grounded to RCA. Custom versions are available if you use your pleases and thankyoues. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Assembled by hand in Bandon Oregon


CGA FXLR-MRCA (pair)
P42.65

Cena za pár
299

Description: Female XLR to Male RCA. The CGA adapters are made from thick high quality brass to help block RFI and EMI. Allows the use of RCA and XLR when needed. Standard configuration is pin 2 hot, pins 1 and 3 grounded to RCA. Custom versions are available if you use your pleases and thankyoues. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Assembled by hand in Bandon Oregon


CGA MXLR-MRCA (pair)
P42.76

Cena za pár
299

Description: Male XLR to Male RCA. The CGA adapters are made from thick high quality brass to help block RFI and EMI. Allows the use of RCA and XLR when needed. Standard configuration is pin 2 hot, pins 1 and 3 grounded to RCA. Custom versions are available if you use your pleases and thankyoues. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Assembled by hand in Bandon Oregon


FRCA-FXLR (pair)
P42.5

Cena za pár
180

Description: Female RCA to Female XLR. Allows the use of RCA and XLR when needed. Cardas GRFA-S mated to a standard Neutrik XLR using Cardas chassis wire and Quad-Eutectic solder. Standard configuration is pin 2 hot, pin 1 grounded to RCA, pin 3 floating. Custom versions are available if you use your pleases and thankyoues. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Assembled by hand in Bandon Oregon


FRCA-MXLR (pair)
P42.7

Cena za pár
180

Description: Female RCA to Male XLR. Allows the use of RCA and XLR when needed. Cardas GRFA-S mated to a standard Neutrik XLR using Cardas chassis wire and Quad-Eutectic solder. Standard configuration is pin 2 hot, pins 1 and 3 grounded to RCA. Custom versions are available if you use your pleases and thankyoues. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Assembled by hand in Bandon Oregon


MRCA-FXLR (pair)
P42.16

Cena za pár
180

Description: Male RCA to Female XLR. Allows the use of RCA and XLR when needed. Cardas GRFA-S mated to a standard Neutrik XLR using Cardas chassis wire and Quad-Eutectic solder. Standard configuration is pin 2 hot, pins 1 and 3 grounded to RCA. Custom versions are available if you use your pleases and thankyoues. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Assembled by hand in Bandon Oregon



MRCA-MXLR (pair)
P42.18

Cena za pár
180

Description: Male RCA to Male XLR. Allows the use of RCA and XLR when needed. Cardas GRFA-S mated to a standard Neutrik XLR using Cardas chassis wire and Quad-Eutectic solder. Standard configuration is pin 2 hot, pins 1 and 3 grounded to RCA. Custom versions are available if you use your pleases and thankyoues. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/Rhodium

Termination: Assembled by hand in Bandon Oregon



GRQ SM-FRCA
P42.8

Cena za pár
180

Description: Male 1/4" mono to female RCA. High quality Cardas GRQ SM mated to a Cardas GRFA-S with Cardas chassis wire and solder. Sold in pairs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/Rhodium

Termination: Assembled by hand in Bandon Oregon



FRCA-MBNC (1)
P42.39

Cena za kus
90

Description: Female RCA to male BNC. Our most common digital adapter, allows the use of 75 ohm RCA digital cable to be connected to a BNC input. Canare BNC mated to a Cardas GRFA-S using Cardas chassis wire and solder.

Base metal: High copper content, non-magnetic brass

Plating: Silver/Rhodium

Termination: Assembled by hand in Bandon Oregon



BTS 6mm
P35.32

Cena za set / 4ks
174

Description: Allows a banana terminated cable to be connected to a binding post using this 6.3mm/.25" spade. Our BTS is the same spade as our CGMS-R- which has a 4mm termination hole. Has a slight angle of 13° for increased cable clearance. Sold as a set of 4. Vidlička na štandardné letovanie

Base metal: High Purity Copper Alebo redukcia na 4mm banán

Plating: Silver/Rhodium

Termination: Assembled by hand in Bandon Oregon



BTS 9mm
P35.31

Cena za set / 4ks
192

Description: Allows a banana terminated cable to be connected to a binding post using this 9mm/.35" spade. Our BTS 9 is the same spade as our CGMS-9R-XS which has a 4mm termination hole. Has a slight angle of 13° for increased cable clearance. Sold as a set of 4.

Base metal: High Purity Copper

Plating: Silver/Rhodium

Termination: Assembled by hand in Bandon Oregon Vidlička na štandardné letovanie, Alebo redukcia na 4mm banán



CABD
P40.9

90 Eur /pár

Cena za pár
120 Eur pár s montážou na kable

Description: Dual banana plug with removable insulator. Standard 0.75" spacing. Gold binding nut for attaching spades or bare wire. Tapered hole at the back for soldering wire or stacking additional banana plugs. Spring loaded split tip for maximum contact surface area and retention. Allows spade terminated cables to be adapted to banana plugs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: 3 AWG/6mm/0.236"



GRQ-A
P42.73

Cena za kus
90

Description: Male 1/4"/6.3mm stereo to female 1/8"/3.5mm mini. High quality Cardas GRQ SS mated to a Neutrik TRS mini plug using Cardas chassis wire and solder. Allows the use of standard 3.5mm stereo plugs to be used on the larger 6.3mm stereo inputs.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Assembled by hand in Bandon Oregon



CPTB RT
P31.24

Cena za set
432

Description: Aluminum housing black anodized with Cardas logo engraved on the top. Cardas 4x24 with shield internal wire and Cardas solder. Cardas R-DIN on a 12" flexible lead that won't interfere with suspended tables. Dual female RCA outputs and ground screws. This allows the use of standard interconnects with your high performance analog rig.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Mounting holes allows it to be fixed to the rack or plinth



CPTB ST
P31.25

Cena za set
432

Description: Aluminum housing black anodized with Cardas logo engraved on the top. Cardas 4x24 with shield internal wire and Cardas solder. Cardas S-DIN on a 12" flexible lead that won't interfere with suspended tables. Dual female RCA outputs and ground screws. This allows the use of standard interconnects with your high performance analog rig.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Mounting holes allows it to be fixed to the rack or plinth



CPIB
P31.22


Cena za kus
240

Description: DIY phono box kit with aluminum housing black anodized with Cardas logo engraved on the top. Dual female RCA outputs and ground screws. This allows the use of standard interconnects with your high performance analog rig or any kind of custom adapter. Does not come with wire or solder.

Base metal: High copper content, non-magnetic brass

Plating: Silver/rhodium

Termination: Mounting holes allows it to be fixed to the rack or plinth




HSL Clear 34x4 Tonearm
P31.40

Cena za set
299

Description: 24"/60.96cm long Clear 34x4 tonearm wire factory terminated with Cardas PCC ER at one end and tinned with Cardas solder at the other so it can easily be terminated to whatever you need. Light weight microfiber jacket for use inside tonearms. Uses our finest copper strands 46-41 AWG.

Conductor: Ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and Cross-field layer geometry

Termination: PCC ER to tinned leads




HSL 33x4 Tonearm
P31.34

Cena za set
124

Description: 24"/60.96cm long 33x4 tonearm wire factory terminated with Cardas PCC EG at one end and tinned with Cardas solder at the other so it can easily be terminated to whatever you need. Thin and flexible teflon jacket.

Conductor: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and Cross-field layer geometry

Termination: PCC EG to tinned leads



HSL Clear 34awg
P31.44

Cena za set
239

Description: Set of four 1.5" long headshell leads made from Cardas Clear 34 AWG stranded wire. Factory terminated with Cardas PCC ER. Uses our finest copper strands 46-41 AWG

Conductor: Ultra fine Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and Cross-field layer geometry

Plating: Silver/rhodium

Termination: Hand terminated in Bandon, Oregon.



HSL PCCER
P31.16


Cena za set
120

Description: 1.5" long headshell leads made from Cardas 33 AWG stranded wire. Factory terminated with Cardas PCC ER.

Conductor: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and Cross-field layer geometry

Plating: Silver/rhodium

Termination: Hand terminated in Bandon, Oregon.



HSL PCCEG
P31.15

Cena za set
75

Description: 1.5" long headshell leads made from Cardas 33 AWG stranded wire. Factory terminated with Cardas PCC EG.

Conductor: Grade 1, 99.9999% pure oxygen free copper with SPN clear coat (Litz), gauge sizes scaled to Golden Ratio proportions and Cross-field layer geometry

Plating: Gold

Termination: Hand terminated in Bandon, Oregon.



R DIN
P34.14

Cena za kus
96

Description: Black anodized 90° aluminum housing with Cardas logo engraved on the end. Comes complete with white delrin TIDP, female 5 pin plug with solderable pins for standard turntables. The 10.3mm/.39" DIN can be rotated to fit multiple orientations as needed.

Base metal: Aluminum

Plating: Gold contacts



S DIN
P34.13

Cena za kus
96

Description: Black anodized aluminum housing with Cardas logo engraved on the end. Comes complete with white delrin TIDP, female 5 pin plug with solderable pins for standard turntables. The 10.3mm/.39" DIN can be rotated to fit multiple orientations.

Base metal: Aluminum

Plating: Gold contacts



S DIN E
P34.17

Cena za kus
39

Description: Black delrin housing. Comes complete with white delrin TIDP, female 5 pin plug with solderable pins for standard turntables. The 10.3mm/.39" DIN can be rotated to fit multiple orientations.

Base metal: Delrin

Plating: Gold contacts

Termination: 10mm/.39" cable opening, solderable gold DIN contacts



M DIN R
P34.16

Cena za kus
34

Description: Black delrin ring to fit Rega tonearm tube. Comes complete with set screw and white delrin M-DIN, male 5 pin plug with solderable pins for standard turntables.

Base metal: Delrin

Plating: Gold contacts

Termination: 16mm/.629" OD, solderable gold DIN contacts



M DIN
P34.3

Cena za kus
20

Description: 5 pin standard male DIN connector with 1mm solderable gold plated pins.

Base metal: Delrin

Plating: Gold contacts

Termination: 11.8mm/.46" OD, solderable gold contacts



TIDP
P34.12

Cena za kus
18

Description: 5 pin standard female DIN connector with solderable gold plated pins. Designed to accept 1mm male pins.

Base metal: Delrin

Plating: Gold contacts

Termination: 11.9mm/.46" OD, solderable gold contacts


PCC ER(4) (rhodium)

P31.18

Cena za set / 4 ks
48

Description: Set of four cartridge clips. Fits most cartridge pins and tonearm pins (1mm and 1.2mm). Solderable end with flexible tip to grip pins.

Base metal: High copper content brass

Plating: Silver/rhodium

Termination: Solder


PCC EG(4) (gold)

P31.27

Cena za set / 4ks
25

Description: Set of four cartridge clips. Fits most cartridge pins and tonearm pins (1mm and 1.2mm). Solderable end with flexible tip to grip pins.

Base metal: High copper content brass

Plating: Gold

Termination: Solder


RCA C SS

P32.25

Cena za set 12 ks
72

Description: Designed to prevent RFI/EMI contamination, these caps fit over unused female RCA's and also prevent dust build up. Logo screen printed onto face. Sold as a pack of 12.

Base metal: High copper content brass

Plating: Nickle


XLR C SS F

P37.8

Cena za pár
70

Description: Designed to prevent RFI/EMI contamination, these caps fit over unused female XLR's and also prevent dust build up. Logo screen printed onto face. Sold as a set of 2.

Base metal: High copper content brass

Plating: Nickle


XLR C SS M

37.9

Cena za pár
70

Description: Designed to prevent RFI/EMI contamination, these caps fit over unused male XLR's and also prevent dust build up. Logo screen printed onto face. Sold as a set of 2.

Base metal: High copper content brass

Plating: Nickle


GRQ CAP SS

P39.7

Cena za kus
8

Description: Designed to prevent RFI/EMI contamination, these caps fit over unused female 1/4" female plugs and also prevent dust build up. Logo screen printed onto face. Sold in singles.

Base metal: High copper content brass

Plating: Nickle


CGSP

P33.29

Cena za kus
5

Description: XLR shorting pin. Shorts female XLR inputs. Sold in singles.

Base metal: High copper content brass

Plating: Gold



GRQ SS (straight stereo)
P39.10

Cena za kus
60

Description: 1/4" Stereo male plug with screw on gold plated cover. Fits cables up to 8mm/.31".

Base metal: High copper content brass
Plating: Silver/rhodium
Termination: Solder



GRQ SM (straight mono)
P39.9

Cena za kus
Posledné kusy 34

Description: 1/4" mono male plug with screw on gold plated cover. Fits cables up to 8mm/.31".

Base metal: High copper content brass
Plating: Silver/rhodium
Termination: Solder



Quad Eutectic Roll Solder
P41.6

Cena za kus
210

Description: 1 lb. / 0,45 kg spool Cardas Quad-Eutectic rosin core solder contains tin, lead, silver, and copper. Melts at 365°. This is the same solder we use in terminating our cables.

Length: approximately 418 feet/127m
Diameter: 0.032"/.81mm



Quad Eutectic Roll Solder
P41.7

Cena za kus
54

Description: 1/4 lb. 0,1125 kg spool Cardas Quad-Eutectic rosin core solder contains tin, lead, silver, and copper. Melts at 365°. This is the same solder we use in terminating our cables.

Length: approximately 106 feet/32m
Diameter: 0.032"/.81mm



Bar Solder 2 lb
P41.2

Cena za kus
88

Description: 2 lb. bar solder. Cardas bar solder contains tin and lead. Melts at 360°. This is the same solder we use in our solder pots for tinning litz wire. Sold as a single 2 lb. bar.



Lead free Bar Solder 1 lb
P41.1

Cena za kus
49

Description: 1 lb. lead free bar solder contains tin and copper. Melts at 440°. Sold as a single 1 lb. bar.



Rosin Flux paste 2oz
P41.3

Cena za kus
29,90

Description: Cardas activated rosin flux. Helps solder flow easily.



CCC, 3ml Bottle
P50.2

Cena za kus
24

Description: Cardas contact conditioner is a contact enhancer. Use in small quantities to both enhance and lubricate connections. Apply with a small brush or Q-tip to only the conductive surface. Nea plikovat' na nevodivé komponenty. Odporúčané opakované každých 30 dní. Reapply every 30 days.

Size: 3 ml



Myrtlewood Blocks Large
P45.11

Cena za set 6 ks
72

Description: Large myrtlewood cuboids are made from America's most beautiful hardwood, the legendary Myrtle tree. Laser engraved with the Cardas logo. Can be used as equipment footers, to isolate gear, and to create more space between equipment. Myrtlewood has a very complex grain structure. The coloring of the wood is unique, varying from a sedate, satiny gray to riotously, multicolored grains of red, yellow, and brown, with many burls and shapes in its grain. Denser than Oak, unseasoned Myrtle logs will not float. Sold as a set of 6.

Size: 1" x 1.618" x 2.618"



Myrtlewood Blocks Small
P45.12

Cena za set 6 ks
60

Description: Small myrtlewood cuboids are made from America's most beautiful hardwood, the legendary Myrtle tree. Laser engraved with the Cardas logo. Can be used as equipment footers, to isolate gear, and to create more space between equipment. Myrtlewood has a very complex grain structure. The coloring of the wood is unique, varying from a sedate, satiny gray to riotously, multicolored grains of red, yellow, and brown, with many burls and shapes in its grain. Denser than Oak, unseasoned Myrtle logs will not float. Sold as a set of 6.

Size: .618" x 1" x 1.618"



MCB
P45.4

Cena za set 6 ks
68

Description: Multi Cable Block. Oregon Douglas Fir with 5 "V" cuts, designed to provide several options for cable lifting. Sold as a set of 6.

Dimensions: 1" x 1.618" x 2.618"



Sweep Record
P47.9

Cena za kus
37

Description: The Cardas Frequency Sweep and Burn-in Record is a unique tuning tool for system set-up, diagnostics and maintenance. It was produced by George Cardas and mastered by Stan Ricker. The Sweeper, in addition to the standard tones, includes relative and absolute polarity checks, vocal channel identification and frequency sweeps that ultrasonically clean the cartridge stylus and degauss the entire system. And, locked, pink noise grooves that repeat endlessly, blank plateaus, even a sync label to check platter speed. All on a 180 gram pressing with a smiling Stan cover.



**Chassis Wire / Interné (aj Externé káblovanie) / Káble v metráži
Cena za bežný meter Eur / 1m**

Cena Eur za 1m IP Code

34 AWG Clear Tonearm Wire	56	Varied
33 AWG Chassis Wire	23	Varied
28.5 AWG Chassis Wire	15	Varied
26.5 AWG Chassis Wire	15	Varied
23.5 AWG Chassis Wire	15	Varied
21.5 AWG Chassis Wire	16	Varied
20.5 AWG Chassis Wire	16	Varied
19.5 AWG Chassis Wire	16	Varied
18.5 AWG Chassis Wire	17	Varied
17.5 AWG Chassis Wire	17	Varied
15.5 AWG Chassis Wire	28	Varied
11.5 AWG Chassis Wire	28	Varied
9.5 AWG Chassis Wire	32	Varied

34X4 Clear Braided Tonearm	220	C9.27
33X4 Braided Tonearm	89	C9.18
33X4 W / Shield Tonearm	95	C9.19
8x24 Network	95	C4.41
2X24M (Double Shield)	112	C9.13
4X24 AWG W / Shield	100	C9.17
1X21 AWG Coaxial	59	C9.1
2X21.5 AWG W / Shield	59	C9.10
20.5 AWG Tape wrapped	14	C21.40
20X2 Twisted pair in jacket	30	C9.9
3X20 Twisted triad in jacket	60	C9.15
15X2 Twisted pair in jacket	50	C9.8
11X2 Twisted pair in jacket	59	C9.3

CROSSLINK 1I Interconnect	57	C2.6
---------------------------	-----------	------

101 Speaker (250 ft spools)	30	C1.25
CROSSLINK 1S Speaker	69	C1.7

Matched Propagation Conductors

SE9 MP Speaker posledné metre	139	C1.20
33.5 AWG MP Tape wrapped	59	Varied
25.5 AWG MP Tape wrapped	95	Varied
25.5 AWG MP PTFE jacket	95	Varied
9.5 AWG MP Tape wrapped	126	Varied

Výhradný distribútor pre Slovenskú republiku :

Platan Audio
M.R. Štefánika 12
920 01 Hlohovec

Kontakt: Eduard Nemček
Email : platan@platanaudio.sk
WEB : www.platanaudio.sk

Mobil : 0905 409 802
Tel. HC : 033 7300531
Tel. predajňa BA :02 527 331 91